
Overview



Input/Output		Controls	
Touch USB	Connects a touch USB cable from the computer to the display.	INPUT	Changes the input source.
HDMI	Connects voice or audio input cable.	MENU	Accesses the main menus, or saves your input and exits the menus.
DP IN	Connects DisplayPort in cable to the display.	۸V	Moves the selection up and down.
DP OUT	Connects DisplayPort out cable to the display.	< >	Adjusts the volume level.
LAN/VOE	Connects a local area network cable.	AUTO/SET	Displays the current signal and mode. Press
SPEAKER OUT	Connects optional external speakers to the display.	ternal speakers to the this button to adjust the (RGB mode only).	
AUDIO IN	Connects an audio cable to the display.	%/I	Turns the power on or off.
RGB/VGA COMPONENT OUT	Connects an RGB/VGA component out cable to the display.		
RGB/VGA COMPONENT IN	Connects an RGB/VGA component in cable to the display.		
RS-232C OUT	Connects an RS-232C out cable to the display.		
RS-232C IN	Connects an RS-232C in cable to the display.		
USB	USB Connects a USB cable to the display.		
IR IN	Connects an IR cable to the display.		

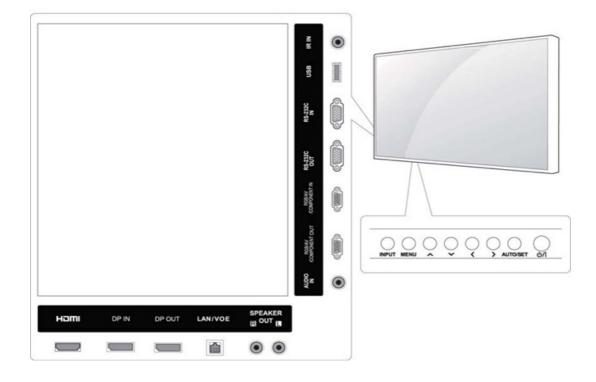

Overview

Model

F1M93AA, F1M93AC



Panel	Panel	IPS, LED with direct backlit
	Viewable Image Area	106,467 cm (41.92 in) widescreen; diagonally measured
	Panel Active Area (W × H)	92,79 x 52,19cm (36.53 x 20.54 in)
	Aspect Ratio	16:9
	Viewing Angle (typical)	Up to 178° horizontal/178° vertical (10:1 minimum contrast ratio)
	Brightness (typical)*	340 cd/m ²
	Static Contrast Ratio (typical)*	1000:1
	Dynamic Contrast Ratio (typical)*	500,000:1
	Response Time (typical)*	6 ms gray to gray
	Pixel Pitch	0.4833 mm
	Color Gamut	68%
	Color Support**	Can display up to 16.7 million colors
		ions represent the typical specifications provided by HP's component ormance may vary either higher or lower. nology.
Touch Frame	Touch Module Type	IR Spread Technology; 5-point multitouch plus gesture
Specifications	Touch Input	Finger, gloved hand, or passive stylus (?8mm diameter)
	Touch Point Response	<10ms with dual touch
	Refresh Rate	100 point/ sec (single-and multi-touch)
	Positional Accuracy	< ± 1.0mm @ 95% area
	Controller Resolution Support	1920 x 1080
	Glass Transmission	85%
	Touch Certification	No certification, only supports Win-7 and Win-8 functionality
On Screen Display	Buttons or Switches	Input, menu, 📥 up, 🔻 down, ◄ left, ▶right, auto/set, power
(OSD) Controls	Languages	9 (German, Simplified Chinese, Traditional Chinese, English, Spanish, French, Italian, Dutch, and Portuguese)
	User Controls	Brightness, Contrast, Backlight, Sharpness, Color, Tint, Color temperature, Image Control, Sound Mode, Input, Aspect Ratio, Audio, Time, Language, Factory Reset
	User Programmable Modes	10
	Audio Controls*	Infinite Sound, Treble, Bass, Standard, Music, Cinema, Sport, Game. * NOTE: Monitor does not ship with speakers (available as an accessory)
Signal Interface/	Horizontal Frequency	30 to 83 kHz
Performance	Vertical Frequency	50 to 60 Hz
	Recommended Resolution	1920 x 1080 @ 60 Hz
	Max Resolution	1920 x 1080 @ 60 Hz



	Bezel Width	Left/right and top/bottom	15 mm (.59 in)
		-	(47.79 x 28.97 x 9.05 in)
		Packaged	108,7 x 73,6 x 23 cm
Mechanical	Dimensions (W × D × H)	Unpacked (head only)	99,09 x 9,27 x 58,5cm (39.01 x 3.64 x 23.03 in)
	Power Cable Length	1,8 m (5.9 ft)	
	Power Saving		n is on; = 0.5W when Wake on Lan is off
	Maximum	105 W (without speakers)	
	Consumption		
	Typical Power	95 W	
	Frequency	50~60Hz	
	Input Power	100 ~ 240 VAC	
Power	Power Supply	Internal	
	Video Cable Lengths	1,8 m (5.9ft)	
	Video Cables included	(1)VGA, (1) HDMI, (1) Displ	layPort
	IR	(1) input	
	Speakers	Not included	
	Audio	(1) audio input jack	
	RS232C	In and Out	
	LAN (RJ45)	(1) RJ45 Input, command,	, control and video over Ethernet
	USB Touch	(1) USB 2.0 port for power	ring touch module, Type B port
	USB	(1) USB 2.0 input for use v	with HP Media Sign Player, Type A port
Other I/O	Output	RGB/VGA, DisplayPort 1.1	a out for tiling
Video/	Input Signal	RGB/VGA, DisplayPort 1.1	a, HDMI (HDCP support on DisplayPort and HDMI)
	Plug and Play	Yes	
	Temperature		
	Default Color	Standard (9300K)	
	Anti-Glare	Yes	
	Maximum Pixel Clock Speed	150 MHz (Digital and Anal	log)
	(non-interlaced)	1600 x 900 @ 60Hz 1440 x 900 @ 60Hz 1280 x 1024 @ 60 Hz 1280 x 800 @ 60 Hz 1280 x 720 @ 60 Hz 1024 x 768 @ 60 Hz 800 x 600 @ 60 Hz 720 x 400 @ 70 Hz 640 x 480 @ 60 Hz	
	Preset VESA Graphic Modes	1920 x 1080 @ 60 Hz 1680 x 1050 @ 60Hz	
	Modes	1680 x 1050 @ 60Hz	



	Weight - maximum	Unpacked	20,7 kg (45.63 lb)	
	-	Packaged	24,3 kg (53.57 lb)	
	Tilt Range	None		
	Swivel Range	None		
	Height Adjustable	None		
	Pivot Rotation	None		
	Base (feet/stand)	There is no stand included	l.	
Environmental	Temperature - Operating	0° to 40° C (32° to 104° F)		
	Temperature - Non- operating	-20° to 60° C (-4° to 140° F	F)	
	Humidity - Operating	20% to 80% non-condensi	ing	
	Humidity - Non-operatin	g 5% to 95%, 38.7° C max w	et-bulb	
	Altitude - Operating	0 to 5000 m (0 to 16,400 f	t)	
	Altitude - Non-operating	0 to 12192 m (0 to 40,000	ft)	
	White LED Backlights	Yes		
	CCFL Panel	No		
	Arsenic-Free Display Glass	Yes		
	Low Halogen ³	No		
	Mercury- Free Display Backlighting	Yes		
Environmental Data		This product has received or approvals and may be labele	• •	-
		• IT ECO declaration		
	Energy Consumption (in accordance with US ENERGY STAR® test method)	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
	Normal Operation	81.4 W	80.1 W	82.3 W
	Sleep	0.58 W	0.71 W	0.58 W
	Off	0.28 W	0.39 W	0.27 W
	Heat Dissipation*	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
	Normal Operation	278 BTU/hr	274 BTU/hr	281 BTU/hr
	Sleep	2 BTU/hr	2 BTU/hr	2 BTU/hr
	Off	1 BTU/hr	1 BTU/hr	1 BTU/hr
		* Heat dissipation is calculated based on the measured watts, as service level is attained for one hour.		watts, assuming the
		Substances (RoHS) di	pliance with the Restriction rective - 2002/95/EC. signed to comply with the W	



Technical Specifications		
	 This produ California; Plastics pa ISO 11469 This produ 	Equipment (WEEE) Directive - 2002/96/EC. Ict is in compliance with California Proposition 65 (State of Safe Drinking Water and Toxic Enforcement Act of 1986). Arts weighing over 25 grams used in the product are marked per and ISO1043. Ict contains 0 % post-consumer recycled plastic (by wt.) Ict is 99 % recycle-able when properly disposed of at end of life
Packaging Materials	External:	PAPER/Corrugated 2876 g
	Internal:	PLASTIC/EPP (Expanded 671 g Polypropylene)
RoHS Compliance	laws and regulati Substances (RoH meeting the requ 2006, RoHS subs legal limits) for a where it is widely	is committed to compliance with all applicable environmental ions, including the European Union Restriction of Hazardous S) Directive. HP's goal is to exceed compliance obligations by irements of the RoHS Directive on a worldwide basis. By July 1 tances will be virtually eliminated (virtually = to levels below II HP electronic products subject to the RoHS Directive, except v recognized that there is no technically feasible alternative (as xemption under the EU RoHS Directive).
Material Usage	This product doe regulatory limits	s not contain any of the following substances in excess of (refer to the HP General Specification for the Environment at: com/hpinfo/globalcitizenship/environment/
	retardants Cadmium Chlorinate Formalder Halogenat Lead carbo Lead and L Mercuric O Nickel - fin frequently Ozone Dep Polybromi Polybromi Polybromi Polychlorii Polychlorii Polychlorii Polychlorii Polyvinyl O packaging Radioactiv	ominated Flame Retardants - may not be used as flame in plastics d Hydrocarbons d Paraffins hyde ed Diphenyl Methanes onates and sulfates ead compounds vide Batteries hishes must not be used on the external surface designed to be handled or carried by the user. oleting Substances nated Biphenyls (PBBs) nated Biphenyl Ethers (PBBEs) nated Biphenyl Ethers (PBBCs) nated Biphenyl (PCB) nated Terphenyls (PCT) Chloride (PVC) - except for wires and cables, and certain retail has been voluntarily removed from most applications. re Substances n (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
Packaging	HP follows these packaging:	guidelines to decrease the environmental impact of product

Technical Specifications

		 Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials. Eliminate the use of ozone-depleting substances (ODS) in packaging materials. Design packaging materials for ease of disassembly. Maximize the use of post-consumer recycled content materials in packaging materials. Use readily recyclable packaging materials such as paper and corrugated materials. Reduce size and weight of packages to improve transportation fuel efficiency. Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.
	End-of-life Management and Recycling	Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/go/reuse-recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.
		The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/recyclers. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.
	Hewlett-Packard	For more information about HP's commitment to the environment:
	Corporate Environmental Information	Global Citizenship Report http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html Eco-label certifications http://www.hp.com/hpinfo/globalcitizenship/environment/ productdesign/ecolabels.html ISO 14001 certificates: http://www.hp.com/hpinfo/globalcitizenship/environment/operations/ envmanagement.html
Options (cold constately)	HP DSD Speakers - Part number F2B36AA	
(sold separately)	HP DSD Security Wall Mount - Part number WB975AA	Ability to install in a variety of commercial applications where an extra-large screen is desired. Enables bundling with select HP Media Players, Thin Clients, or EliteDesk Mini & USDT PC's, directly behind the display, away from view, for a quick and easy comprehensive solution. Includes a Quick Release for easy mounting and removal of a compatible HP Thin Client or HP USDT PC. Supports 40" to 60" display sizes. Weight restrictions may apply. Includes tilt friction knobs to retain tilt in any position.
	HP MP4 Model 4200, Digital Signage Player - Part number G5R07UT/G5R07UA	Attract and inform your customers with the compact and affordable HP MP4 Digital Signage Player, Model 4200, designed to drive static screen layouts and full-screen video signage content. ⁴



	HP MP9 Model 9000, Digital Signage Player - Part number G5R08UT/G4R08UA	Boost sales and engage customers with compelling dynamic and interactive signage content driven by the HP MP9 Model 9000, HP's smallest and most powerful digital signage player. ⁴
	HP Digital Signage Installation Service	A range of installation service Care Packs. See www.hp.com/go/digitalsignage.
What's in the box?	Display and Accessories	HP LD4245tm 41.92-inch Interactive LED Digital Signage Display VGA cable (1.8m) 5.9 ft HDMI cable (1.8m) 5.9 ft DisplayPort cable (1.8m) 5.9 ft USB cable Type A male to Type B male(1.8 m) 5.9 ft IR Receiver cable (1.5 m) 4.9 ft Wireless remote control
	Documentation	CD (includes user guide, warranty, drivers)
	Featured Software	Network Sign Manager, Video Over Ethernet
Other	User Guide Languages	<i>EMEA Region</i> : Danish, Dutch, Finnish, French, German, Italian, Norwegian, Spanish (Int'l), Swedish, Czech, Greek, Hungarian, Polish, Russian, Slovenian, Turkish, Arabic, Kazakh <i>Americas Region</i> : English, French, Spanish, B. Portuguese <i>APJ Region</i> : English, S. Chinese, T. Chinese, Bahasa Indonesia
	Warranty Languages	<i>EMEA Region</i> : Danish, Dutch, Finnish, French, German, Italian, Norwegian, Spanish (Int'l), Swedish, Czech, Greek, Hungarian, Polish, Russian, Slovenian, Turkish, Arabic, Kazakh <i>Americas Region</i> : English, French, Spanish, B. Portuguese <i>APJ Region</i> : English, S. Chinese, T. Chinese, Bahasa Indonesia
	Color	Black
	VESA External Mounting	Yes, 200 x 200mm
	Security Lock-Ready	Yes
	Certification and Compliance	CE, CB, NOM ,PSB, ICE, TUV-S, CCC, BSMI, FCC, C-UL, PSB, C-Tick, SmartWay Transport Partnership (NA), Microsoft WHQL Certification (Windows 8, Windows 7).
	Compatibility	Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
	Country of Origin	South Korea
Service and Warranty		a 3 year standard limited warranty. Optional Care Pack Services are extended beyond your standard warranties. ⁵



Technical Specifications

© Copyright 2014 Hewlett-Packard Development Company, L.P.

1. HD content required for HD images.

2. All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

3. External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.

4. Mounting hardware sold separately.

5. HP Care Pack Services are sold separately. Service levels and response times for HP Care Pack Services may vary depending on your geographic location. Service starts from date of hardware purchase. Restrictions and limitations apply. See www.hp.com/go/cpc for details.

All specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.



Legacy Technology Services

We Rent & Sell All Types Of Barcode Equipment

Call now to talk to an expert 866-271-9891

About us

- Legacy Technology Services is a leading nationwide provider of mobile computing, barcode, printers and point of sale equipment and services.
- For over a decade, thousands of clients across North America have trusted us to provide equipment from leading manufacturers backed by the services to support them.

Latest Hardware from top manufacturers

• Legacy handles virtually every major manufacturer of mobile computing, barcoding and point of sale equipment.

Expert Repair and Maintenance services

· Legacy is one of the best repair facilities in North America

Discontinued product sourcing

• They don't make it anymore? Our inventory also includes manufacturer close-outs and discontinued equipment to support our clients legacy infrastructure.

Trade-in and Disposal services

- That old equipment laying around your facility may still have some value. Legacy routinely purchases equipment from our clients around the globe.
 - Data destruction
 - · Hardware disposal
 - Auditing services

Dedicated client account team

• Dedicated, highly trained account managers are here to answer all your questions and provide top notch service.

Equipment rental services

• Sometimes renting is a better solution, Legacy's huge rental inventory provides the equipment you need for temporary needs and projects.





<u>Legacy, Inc.,</u> 160 West Road, Ellington, CT 06029

Toll Free: 866-271-9891 Fax: 888-522-4684

www.LegacyGlobal.com

Some brands we carry







Honeywell













