**TSC**
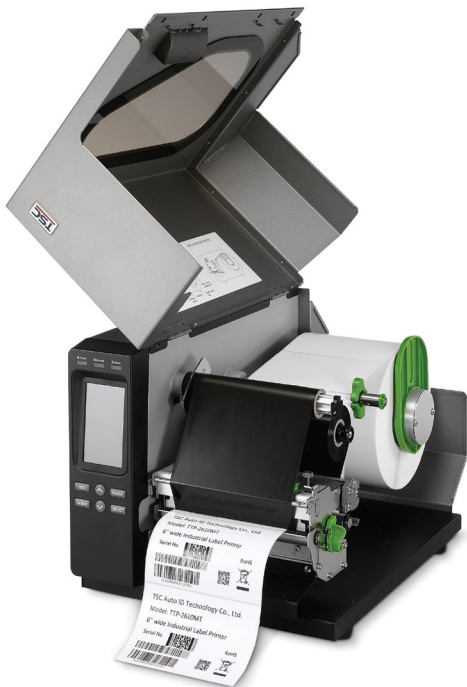The Smarter Choice.

**TTP-2610MT SERIES** – Industrial Thermal Transfer Bar Code Printer
# MORE VALUE, MORE FEATURES, HIGHER RELIABILITY

## KEY FEATURES

- High quality die cast aluminum design
- "Thermal Smart Control"™ print technology produces cleanest, high quality barcodes
- 4.3" color LCD with 6-button menus and touch panel operation
- 203 dpi and 300 dpi models
- Ethernet, USB 2.0, USB Host, serial and parallel connectivity are standard
- 256 MB SDRAM, 512 MB Flash
- SD Flash card memory expands storage to 32 GB
- Powerful 32 bit 536 MHz RISC processor
- Auto TPH resolution switch detection
- Standard industry emulations right out of the box including Eltron® and Zebra® language support
- USB host for stand-alone or data entry at print site

## APPLICATIONS

- Compliance Labeling For Shipping & Receiving
- Pallet Labeling
- Inventory Control Labeling
- Drum Labeling
- Warning Labels
- Custom Signage
- Brand Marketing Featuring Graphics, Logos & Texts
- Multiple-up Labels (two or three labels across)

# TTP-2610MT SERIES – Industrial Thermal Transfer Bar Code Printer

| PRINTER MODEL | TTP-2610MT | TTP-368MT |
|---|---|---|
| Resolution | 8 dots/mm (203 DPI) | 12 dots/mm (300 DPI) |
| Printing method | Thermal Transfer & Direct Thermal | |
| Max. print speed | 305 mm (12")/second | 254 mm (10")/second |
| Max. print width | 168 mm (6.61") | 168 mm (6.61") |
| Max. print length | 14,732 mm (580") | 6,604 mm (260") |
| Enclosure | Die-cast aluminum frame/Metal cover with large clear media view window | |
| Physical dimension | 355 mm (W) x 337 mm (H) x 520 mm (D)<br>13.98" (W) x 13.27" (H) x 20.47" (D) | |
| Weight | 23 kg (50.71 lbs) | |
| Label roll capacity | 208.3 mm (8.2") OD | |
| Ribbon | 450 meter long, max. OD 81 mm, 1" core (Ink coated outside/inside) | |
| Ribbon width | 50.8 mm ~ 178 mm (2" ~ 7") | |
| Processor | 32-bit RISC CPU | |
| Memory | • 512 MB Flash memory<br>• 256 MB SDRAM<br>• SD Flash memory card reader for Flash memory expansion, up to 32 GB | |
| Interface | • RS-232<br>• Centronics<br>• USB 2.0<br>• Internal Ethernet, 10/100 Mbps<br>• USB host, for scanner or PC keyboard<br>• GPIO (factory option)<br>• Bluetooth (user option)<br>• External 802.11 b/g/n wireless (user option) | |
| Power | Internal universal switching power supply<br>• Input: AC 100-240V, 3.0A, 50-60Hz<br>• Output: DC 24V, 8.33A, 200W | |
| LCD | 16 bits Color, 480 x 272 pixels, with back lights, Resistive Touch Screen | |
| Operation switch, button | 1 power switch, 6 buttons (Menu, Pause, Feed, Up, Down, Select) | |
| Sensors | • Transmissive gap sensor (position adjustable)<br>• Black mark reflective sensor (position adjustable)<br>• Ribbon encode & ribbon end sensor<br>• Head open sensor | |
| Real time clock | Standard | |
| Internal fonts | • 8 alpha-numeric bitmap fonts<br>• Monotype Imaging® true type font engine with one CG Triumvirate Bold Condensed scalable font | |
| Bar code | • 1D bar code<br>Code 39, Code 93, Code 128UCC, Code 128 subsets A.B.C, Codabar, Interleave 2 of 5, EAN-8, EAN-13, EAN-128, UPC-A, UPC-E, EAN and UPC 2(5) digits add-on, MSI, PLESSEY, POSTNET, China POST, GS1 DataBar, Code 11<br>• 2D bar code<br>PDF-417, Maxicode, DataMatrix, QR code, Aztec | |
| Font and barcode rotation | 0, 90, 180, 270 degree | |
| Printer language | TSPL-EZ™ (Compatible to EPL, ZPL, ZPL II) | |
| Media type | Continuous, die-cut, fan-fold, tag, notched, black mark (outside wound) | |
| Media width | 50.8 ~ 172.7 mm (2" ~ 6.8") | |
| Media thickness | 0.06 ~ 0.254 mm (2.36 ~ 10 mil) | |
| Media core diameter | 76.2 mm (3") | |
| Label length | 10 ~ 14,732 mm (0.39" ~ 580") | 10 ~ 6,604 mm (0.39" ~ 260") |
| Environment condition | Operation: 5 ~ 40°C, 25 ~ 85% non-condensing<br>Storage: -40 ~ 60°C, 10 ~ 90% non-condensing | |
| Safety regulation | FCC Class A, CE Class A, CCC | |
| Environmental concern | Comply with RoHS, WEEE | |
| Accessories | • Windows labeling software CD disk<br>• Quick start guide<br>• USB cable<br>• Power cord<br>• Ribbon paper core | |
| Limited warranty | • Printer: 2 years<br>• Print head: 25 km (1 million inches) or 12 months which comes first<br>• Platen: 50 km (2 million inches) or 12 months which comes first | |
| Factory options | • GPIO interface | |
| Dealer options | • Peel-off kit (include internal rewind & peel off module)<br>• Heavy duty cutter (full cut) | |
| User options | • Bluetooth module (serial interface)<br>• 802.11 b/g/n wireless module (serial interface)<br>• KP-200 Plus keyboard display unit<br>• KU-007 Plus programmable smart keyboard | |

## TSC
**The Smarter Choice.**

# Legacy Technology Services

## We Rent & Sell All Types Of Barcode Equipment

Call now to talk to an expert
# 866-271-9891

www.LegacyGlobal.com

**Some brands we carry**

**About us**
- Legacy Technology Services is a leading nationwide provider of mobile computing, barcode, printers and point of sale equipment and services.
- For over a decade, thousands of clients across North America have trusted us to provide equipment from leading manufacturers backed by the services to support them.

**Latest Hardware from top manufacturers**
- Legacy handles virtually every major manufacturer of mobile computing, barcoding and point of sale equipment.

**Expert Repair and Maintenance services**
- Legacy is one of the best repair facilities in North America

**Discontinued product sourcing**
- They don't make it anymore? Our inventory also includes manufacturer close-outs and discontinued equipment to support our clients legacy infrastructure.

**Trade-in and Disposal services**
- That old equipment laying around your facility may still have some value. Legacy routinely purchases equipment from our clients around the globe.
  - Data destruction
  - Hardware disposal
  - Auditing services

**Dedicated client account team**
- Dedicated, highly trained account managers are here to answer all your questions and provide top notch service.

**Equipment rental services**
- Sometimes renting is a better solution, Legacy's huge rental inventory provides the equipment you need for temporary needs and projects.

Legacy, Inc.,
160 West Road,
Ellington, CT 06029

Toll Free: 866-271-9891
Fax: 888-522-4684