




[BHT-1100]

The BHT-1100 handheld barcode terminal makes barcode scanning quicker and easier, thus increasing operator efficiency. New Advanced Scan Plus™ CCD technology allows the BHT-1100 to read barcodes three times faster than a laser scanner and from up to 25 feet or more away. Other outstanding features include an ergonomically shaped grip and large keyboard, as well as IEEE802.11b/g/n-compliant, high-speed wireless transmission and VoIP.

SCANNING PERFORMANCE

Even blots or smears don't deter the new Advanced Scan Plus™ scan engine, with laser-scanner performance levels.

Advanced Scan Plus™ Advantage #1 High-speed scanning



- ▣ Unique Advanced Scan Plus™ CCD method achieves approximately three times the speed of laser scanners
- ▣ Fast, continuous scanning saves time

Advanced Scan Plus™ Advantage #2: Long-range scanning



- ▣ Scan from close up or far away
 - ▣ 25 feet or more
- ▣ Easily scan from floor to ceiling without having to change position

Advanced Scan Plus™ Advantage #3: Unaffected by blots or smears

- ▣ Reads barcodes in two dimensions instead of only one, resulting in quick, accurate scanning of even smeared or dirty codes
- ▣ Also reads high-density and wide barcodes

Conventional scanners



Easily affected by blots or smears

Advanced Scan Plus™



Vertically expanded view not affected by blotted or smeared barcodes

DURABILITY



Rugged construction features

- ▣ Shock-absorbent material molded onto scanner head prevents damage due to bumping or dropping
- ▣ Durable keys, with lettering that won't wear off
- ▣ Rugged, long-lasting construction resists damage in tests of 60 drops onto concrete from a height of 1.2 m
- ▣ G-sensor

ERGONOMIC DESIGN


Easy to hold and operate—reduces operator fatigue



Large, easy-to-read screen and slim grip

The large, 3.5-inch screen and slim grip increase ease of use. Frequently used keys such as ENT and SCAN are centrally located at the top to minimize finger movement, reducing finger fatigue.

Large keyboard is easy to use, even with gloves

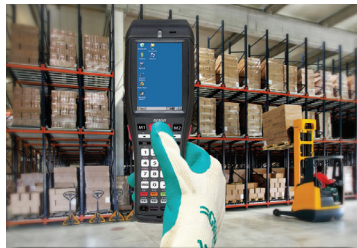

Tilt angle based on usage studies



- ▣ Specially designed tilt angle is based on studies of the unit in actual operation; minimizes screen glare in bright light, allows high readability in all conditions

Highly stable grip




- ▣ Molded back ensures secure grip
- ▣ Hand strap further increases grip stability
- ▣ Stable operation with either keyboard or stylus

ADVANCED FEATURES

Large memory, high processor speed

- ▣ Allows significantly faster processing than conventional devices

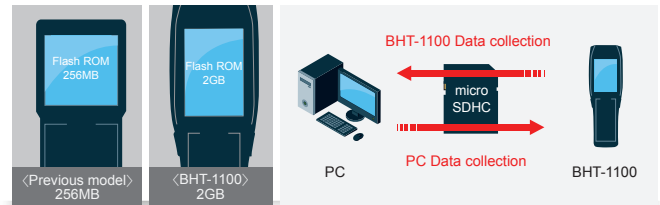

- ▣ Flash ROM capacity significantly increased to 2 GB, preventing slowdowns due to insufficient memory
- ▣ MicroSDHC compatibility allows smooth, high-speed data transfer between BHT and external devices

New BHT Backup

- ▣ Automatically backs up data to internal flash memory or external MicroSDHC, allowing quick resumption of work in case of battery failure

Built-in digital camera



- ▣ Take photos of defective goods during inspection, eliminating the need to carry a separate camera (3.2 MP option)

ACCESSORIES (sold separately)



Transmission unit (cradle)

- ▣ Allows battery charging and data transmission between BHT and higher-end devices)

Backup batteries


- ▣ Standard (2300 mAh)
- ▣ Large capacity (3450 mAh)

TYPICAL APPLICATIONS



Order picking

With the unit's large, 3.5-inch high-resolution screen, information is easy to read, preventing eye fatigue even during long periods of use

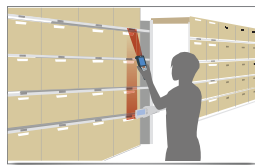

Inventory management


Even with stock shelved from floor to ceiling, barcodes can be quickly scanned without the need of a stepladder, saving valuable time



DATA TRANSMISSION


IEEE802.11b/g/n compatible

- High data-transfer speeds of up to 65 Mbps

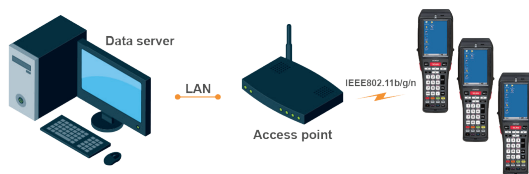

Wireless LAN security

- Highly reliable WPA/WPA2 security prevents unauthorized access or data theft

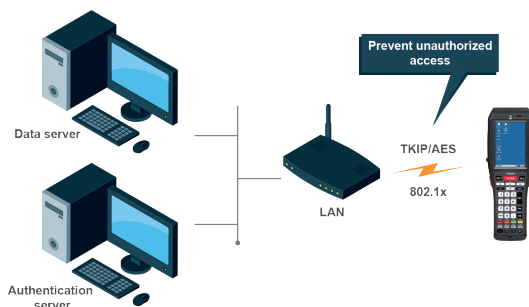

Bluetooth® transmission

- Built-in Bluetooth Ver. 2.0 allows wireless communication with printer, PC, mobile phone, etc.



DEVELOPMENT TOOLS

Compatible with variety of development tools

- Microsoft Visual Studio 2008
 - Microsoft Visual C++¹
 - Microsoft Visual Basic^{1,2}
 - Microsoft Visual C#^{1,2}
- Microsoft Visual Studio 2005
 - Microsoft Visual C++¹
 - Microsoft Visual Basic^{1,2}
 - Microsoft Visual C#^{1,2}

- Development of applications using BHT-specific features requires the library/class library included in the BHT-specific Software Development Kit (SDK), which can be downloaded free from our website at www.denso-adc.com.
- The BHT-specific class library is compatible with the following versions: Microsoft .NET Compact Framework 2.0/3.5.

SOFTWARE

HP Windows® CE Software Development Kit (SDK) specifically for BHT¹. Download at denso-adc.com

- Keyboard interface software [kbifCE]²


- Pre-installed on BHT
- Can be downloaded free of charge by customers who have purchased a Windows-version BHT

INCLUDED ACCESSORIES

- Hand strap
- Stylus pen
- Operation guide
- HP** User manual. Download at denso-adc.com

Battery and battery cap not included

DIMENSIONS

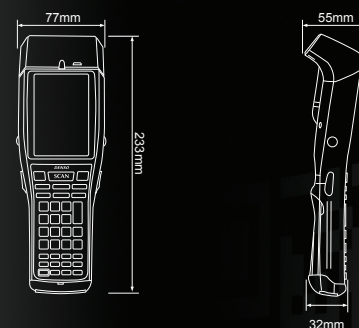

Unit: mm (all measurements for reference only)

	CU-1133	CU-1111
Transmission method	RS-232C/USB2.0 full-speed compliant	Ethernet 100BASE-TX)
Charging time (main unit)	Backup battery: approx. 3 hours; large-capacity battery: approx. 4.5 hours	
Pre-charge	Backup battery: approx. 3 hours; large capacity battery: approx. 4.5 hours	
Size	133 x 94 x 111 mm (DxWxH)	
Power Sply	AC adapter (AD3-1012/3000/02)	

Direct-connection cables

(To connect BHT directly to host system)

- RS-232C
- USB

Carrying cases

- SCBHT-1100 (Soft case)
- WHBHT-1100 (Waist case)

In-store inspection

Large amount of information can be displayed on a single screen, reducing inspection time



Ordering

Wide-area wireless coverage and stable data-transmission speed makes ordering quicker and easier even in large stores


BHT-1100 SPECIFICATIONS

Type		BHT-1171BWB-CE	BHT-1170BWB-CE
OS		Windows Embedded CE6.0 R3	
CPU		32-bit RISC 800 MHz	
Memory	RAM	512 MB	
	Flash ROM	2.0 GB	
Display	Resolution ¹	320 x 480 (3.5" HVGA) / 240 x 320 (3.5" QVGA)	
	Type	Backlit liquid-crystal dot matrix	
Scanner	Scanning system	Advanced Scan Plus™ (CCD)	
	Readable codes	EAN-13/8 (JAN-13/-8), UPC-A/-E, UPC/EAN (with add-on), Interleaved 2 of 5, Standard 2 of 5, Codabar (NW-7), Code 39, Code 93, Code 128, GS1-128 (EAN-128), GS1 DataBar (RSS)	
	Scanning distance	640 mm (resolution 0.33 mm), 1,300 mm (resolution 1.0 mm)	
	Minimum resolution	0.125 mm	
	Scan confirmation	LED (3 colors: blue, red, green), speaker, vibrator	
Keypad	Number of keys	36 (excluding power button) plus 3 trigger keys	
Data transfer	Wireless I/F	Standard compliance	IEEE802.11b/g/n
		Frequency	2.4 GHz
		Transmission distance ²	Indoor: 150 m; outdoor: 300 m
		Available channels ³	IEEE802.11b: 11/5.5/2/1 Mbps; IEEE802.11g: 54/48/36/24/18/12/9/6 Mbps; IEEE802.11n: 65/58.5/52/39/26/19.5/13/6.5 Mbps
		Security	WEP40, 128, WPA-PSK (TKIP, AES), WPA2-PSK (TKIP, AES), WPA-1x (TKIP, AES/EAP-TLS, PEAP), WPA2-1x (TKIP, AES/EAP-TLS, PEAP), 802.1x (EAP-TLS, PEAP)
	Bluetooth	Bluetooth Version 2.0, EDR Class 2	
Cradle I/F		RS-232C/USB client	
Card slot		microSDHC X1	
Camera		3.2 MP (megapixels)	N/A
Power Supply	Main battery	Lithium-ion battery	
	Operating time	Standard battery: approx. 17 hours; large-capacity battery: approx. 25 hours ³	
Additional features		Speaker, LED, vibrator, microSDHC	
Environmental requirements	Operating temperature	-20 to 50 °C ⁴ / -4 to 122°F	
	Protection level	IP54	
	Drop resistance ⁵	1.5m / 5ft drop on concrete floor, 10 times each on all 6 sides (total 60 times)	
Weight		380 g	375 g

1. LCD panel manufactured using high-precision technology. Number of effective pixels is more than 99.99%, but up to 0.01% of pixels may be missing or not completely bright.
2. Transmission distance and speed are theoretical values and may differ according to operating environment.
3. At a scanning:wireless transmission:screen transition:stand-by ratio of 1:1:1:20, wireless stand-by (power-save on) and with LCD backlight low. Given values are for room temperature; actual operating hours may vary according to environment.
4. Zero to 40 °C when charging.
5. Experimental value at room temperature; not guaranteed.

READING AND VIEWING DISTANCE

BHT-1100 Scanning distance (mm)

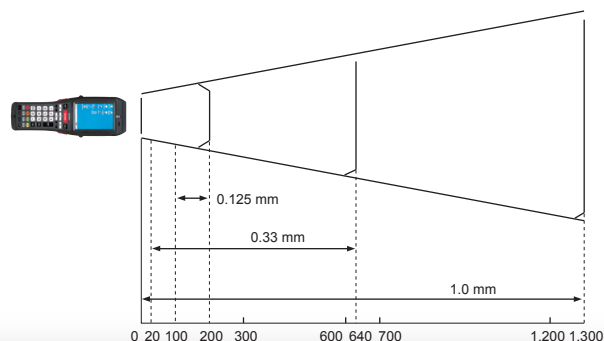

BHT-1100 Web page

[DENSO ADC]

3900 Via Oro Ave.

Long Beach, CA. 90810

Phone + (888) MY DENSO

+ (888) 693 3676

Fax + (310) 835 8724

denso-adc@denso-diam.com

www.denso-adc.com

DENSO **ADC**
INVENTOR OF THE Q R CODE®

Legacy Technology Services

We Rent & Sell All Types Of Barcode Equipment

Call now to talk to an expert

866-271-9891

www.LegacyGlobal.com

Some brands we carry



MOTOROLA

Intermec

DATALOGIC™

Honeywell

EQUINOX
PAYMENTS



About us

- Legacy Technology Services is a leading nationwide provider of mobile computing, barcode, printers and point of sale equipment and services.
- For over a decade, thousands of clients across North America have trusted us to provide equipment from leading manufacturers backed by the services to support them.

Latest Hardware from top manufacturers

- Legacy handles virtually every major manufacturer of mobile computing, barcoding and point of sale equipment.

Expert Repair and Maintenance services

- Legacy is one of the best repair facilities in North America

Discontinued product sourcing

- They don't make it anymore? Our inventory also includes manufacturer close-outs and discontinued equipment to support our clients legacy infrastructure.

Trade-in and Disposal services

- That old equipment laying around your facility may still have some value. Legacy routinely purchases equipment from our clients around the globe.
 - Data destruction
 - Hardware disposal
 - Auditing services

Dedicated client account team

- Dedicated, highly trained account managers are here to answer all your questions and provide top notch service.

Equipment rental services

- Sometimes renting is a better solution, Legacy's huge rental inventory provides the equipment you need for temporary needs and projects.



Legacy, Inc.

160 West Road,
Ellington, CT 06029

Toll Free: 866-271-9891

Fax: 888-522-4684