Dimensions

DENSO

HANDY SCANNER






















GT20 series specifications

			Barcode model		2D Code model	
Туре			GT20B-SM (U)*1	GT20B-SM (R)	GT20Q-SM (U)*1	GT20Q-SM (R)
Scanner	Method		Advanced Scan Plus (CCD)		Area Sensor	
	Readable codes	2D Code	_		QR code, Micro QR code, SQRC, iQRcode, Data Matrix (ECC200), PDF417, Micro PDF417, Maxi code, Aztec, GS1 Composite	
		Barcode	EAN-13/8 (JAN-13/8), UPC-A/E, UPC/EAN (with add-on), Interleaved 2 of 5 (ITF), Standard 2 of 5 (STF), CODABAR (NW-7), CODE32, CODE39, CODE93, CODE128, GS1-128 (EAN-128), GS1 Databar (RSS), MSI, Plessey		EAN-13/8 (JAN-13/8), UPC-A/E, UPC/EAN (with add-on), Interleaved 2 of 5 (ITF), Standard 2 of 5 (STF), CODABAR (NW-7), CODE39, CODE93, CODE128, GS1-128 (EAN-128), GS1 Databar (RSS)	
	Minimum resolution	2D Code	_	-	0.167 mm	
		Barcode	0.125 mm			
	Marker		_		Area guide marker	
	PCS value		not less than 0.30			
	Angle		±50°C			
	Skew angle		-		360°	
	Image capture		_		BMP, JPEG output, thumbnail view	
	Scanning confirmation		Confirmation LED (Blue, Green, Red), Buzzer (with 3-level volume control and 3-level tone control)			
Communication interface	Method		USB	RS-232C	USB	RS-232C
	Connector		USB connector (A type)	Dsub-9S	USB connector (A type)	Dsub-9S
	Cable		2 m	2 m, 5 m	2 m	2 m, 5 m
Power			Supply from the connection*2	Directed AC adapter	Supply from the connection*2	Directed AC adapter
Environment requirements	Protection rating		IP65			
	Drop resistance*3		2.0 m × 60 times on a concrete floor			
	Operating temperature		-20−50°C			
	Operating humidity		10 to 90% RH (without dews)			

- *1: Two methods are supported: a USB keyboard interface and a USB-COM interface. The factory default is a USB keyboard interface for GT20B and a USB-COM interface for GT20D.
 *2: Please check the connection beforehand because this type of connection may not be possible depending on the model of the PC or USB hub.
 *3: Result obtained in a test under regular temperature is shown and not meant as a guarantee.

Scanning performance

Weight (excl. cable)

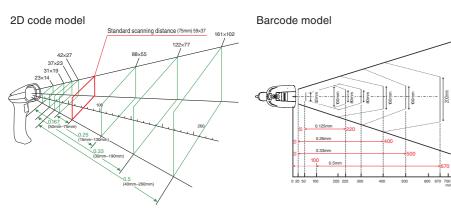

Accessories

● Scanner ● Interface cable ● AC adaptor ● Operation Guide ● Instruction manual 🖳

● S-GT20 (Stand) ● S-GT21 (Stand)

 H-GT10 (Hands-free stand) H-GT11 (Hands-free stand) H-GT20 (Hands-free stand)H-GT21 (Hands-free stand)

- USB driver [Active USB-COM port driver]

 □
- Setting software [Scanner Setting (for barcode models)]
 [Scanner Setting 2D (for 2D code models)]
 [SQRC Setting (for 2D code models)]

Optional accessories (separetely sold)

Items with this mark can be downloaded on our webpages for free.


For details on these products, see this webpage. http://www.denso-wave.com/en/adcd/

- QR Code, SQRC, and Advanced Scan are registered trademarks of DENSO WAVE Incorporated.
- Appearance and specification may be changed without prior notice for improvement.
 Data on this catalog are as of April 2015.



Secure robustness





Highest standard in the class of 2 m \times 60 times GT20 has a highly durable design to withstand strong impact, so there is nothing to worry about if you drop





Environmental resistance

IP code rating of IP65 achieved GT20 is recommended with confidence even in the case that it is used under severe conditions, such as at dusty






Operating temperature

Between -20 and 50°C

GT20 can be used under various types of environment, such as inside cold storage chambers and semi-outdoor areas in plants, expanding the range of use for customers.


Outstanding operability





GT20 allows secure confirmation by "light," "sound" and "vibration" even in noisy conditions.





Lightweight body weighing 180 g The lightweight and compact design can reduce fatigue when used for long periods. Its user-friendly body is highly durable yet lightweight.





With an area guide marker The marker makes it easy for users to identify the reading area, enabling smooth operations.

Overwhelming reading performance





High-speed reading

Adopting a powerful reading algorithm created exclusively by the manufacturer that developed the QR Code

Smooth reading that does not cause stress on users contributes to improving work efficiency.





screen reading

enables smooth reading of codes displayed on a liquid crystal screen. GT20 can read QR Codes displayed on a PC or tablet screen, expanding the range of use for customers.

The original LED lighting control function



Poorly printed label reading

Efficient at reading dirty and blurred codes GT20 has such a high reading performance that it can read even poorly printed codes very efficiently, so there is nothing to worry about even at a site under severe conditions where codes easily become dirty, delivering "What a high reading performance!"





Concatenated QR Code reading

GT20 can read a concatenated QR Code at one time.

360° reading

Quick operations with 360° reading Users can carry out operations without concern as to the direction of barcodes

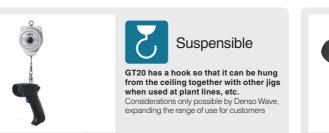








Image capture

The connector cover, which is resilient against becoming detached and breaking, firmly locks the cord. The body is not the only durable part. Denso Wave paid meticulous attention to even the shape of the connector cover and achieved


Diversified functions



Magic Key

me more efficient by allocating a convenient function to the Magic Key.

ime the Magic Key is pressed. edetermined characters are sent every time he Magic Key is pressed.





Free software applications "Scanner Setting" and "Scanner Setting 2D" are included, allowing easy configuration of the reading condition, data format, etc. according to the object to be read. These applications providing convenient functions can reduce customers' work load concerning

application development.



mage shooting possible When a non-conforming product is detected on a plant production line, 大阪中淀川区宮原 for example, the image of the product can be captured with GT20 on site and sent to its host.



Equipped with data collation and edit functions Development of a dedicated application is not required

Equipped with a function to compare the registered master data with the read data

This function enables easy establishment of systems for non-conforming product checking and incorrect labeling checking. Furthermore, the simplified programming software application "ADF Script" makes it easy to edit data freely, including data sorting,



Point Scan Mode

GT20 can read only the targeted code indicated by the central







One-time reading of multi-row barcodes

GT20 can read a barcode with up to three rows at a time.





Legacy Technology Services

We Rent & Sell All Types Of Barcode Equipment

Call now to talk to an expert

866-271-9891

About us

- Legacy Technology Services is a leading nationwide provider of mobile computing, barcode, printers and point of sale equipment and services.
- For over a decade, thousands of clients across North America have trusted us to provide equipment from leading manufacturers backed by the services to support them.

Latest Hardware from top manufacturers

• Legacy handles virtually every major manufacturer of mobile computing, barcoding and point of sale equipment.

Expert Repair and Maintenance services

· Legacy is one of the best repair facilities in North America

Discontinued product sourcing

 They don't make it anymore? Our inventory also includes manufacturer close-outs and discontinued equipment to support our clients legacy infrastructure.

Trade-in and Disposal services

- That old equipment laying around your facility may still have some value.
 Legacy routinely purchases equipment from our clients around the globe.
 - · Data destruction
 - · Hardware disposal
 - Auditing services

Dedicated client account team

 Dedicated, highly trained account managers are here to answer all your questions and provide top notch service.

Equipment rental services

• Sometimes renting is a better solution, Legacy's huge rental inventory provides the equipment you need for temporary needs and projects.











(AAA) POOL

Toll Free: 866-271-9891 Fax: 888-522-4684 www.LegacyGlobal.com
Some brands we carry





















