

SR61T

(SR61T1D, SR61T2D,
SR61THP, SR61TL)

Industrial Tethered
Scanner Family



The Intermec SR61T family of handheld barcode scanners offers a broad choice of linear imager, area imager and laser scanning options. The SR61T family of scanners are:

- **Ruggedized** – designed to maximize up time by withstanding 26 drops to concrete or steel from 2 m (6.5 foot), hot and cold temperature extremes, constant forklift vibration and windblown dust and rain.
- **Easy to use** – all models feature highly visible easy to use aimers that make spotting the bar code fast and efficient.
- **Ergonomic** – area imagers feature omni-directional bar code reading to eliminate orientation and improve operator efficiency.
- **Powerful** – 2D imagers feature VGA+ resolution image capture, real time video and 1D & 2D bar code scanning in the single multipurpose device spreading your investment over multiple uses.
- **Fast** – features USB 2.0 full speed interface to quickly transfer bar code data or images to the host application saving operator time.

- **High Performance** – the HP imager model offers superior motion tolerance and fast time to read. A combination of white illumination and red laser aimer provide this scanner with exceptional time to read performance, saving time reading linear and 2D codes.
- **Future proofed** – 2D imagers easily read linear, stacked, composite and matrix barcodes.

The Intermec SR61T handheld scanner family meets the needs of rugged applications in warehouse, distribution and industrial manufacturing, and also supports proof of delivery and point of service applications. Featuring high impact housing that is virtually impenetrable as well as a solid state design, the SR61T scanners exceed industrial and military standards, and can be counted on for use in harsh environments where dust, moisture or extreme temperatures are constants and production uptime is critical. If your enterprise requires data collection tools that are dependable then the SR61T is the product for you.

With multiple scan options, including linear, area and standard range laser, SR61T scanners allow users to configure their scanner to meet the needs of their environment – whether this includes reading specific barcode symbologies or decoding poor quality or damaged

symbols. If reading bar codes quickly while in motion is critical to your application, then the SR61THP is the right choice for you. Its high performance exceptional time to decode will add efficiency to many data collection environments.

The flexibility of the SR61T family of scanners also means customers can increase productivity while keeping costs down. This flexibility is demonstrated with the ability to interface with Intermec computers, printers and standard PCs. Additionally, users may connect to many host devices supporting multiple applications including inventory management, picking, shipping and receiving, cross docking, work-in-process, tool crib, and pallet tracking.

To save time during deployment the SR61T family includes Intermec's EasySet™ software setup tool for quick and easy configuration and personalization of your scanner system. The SR61T family can improve many data capture applications by quickly decoding poor quality or damaged barcodes. The area imagers on board image capture and video function can remove the expense of separate digital image equipment often used to document and prove the condition of warehouse goods. Users can also quickly set security options, select beeper tones and volumes, specify good read and error read responses, and make many other customizations.

Physical Characteristics

Length: 19.4 cm (7.6 in) **Width:** 7.2 cm (2.8 in)
Height: 13.1 cm (5.2 in) **Weight:** 320 gm (11.2 oz)

Power Requirements

5 vdc, 1.7A

Connectivity

Connection to Intermec computers and printers.
Also connects to standard PCs.

Interfaces

RS232, USB 2.0 (HID Keyboard, Virtual Com Port, Video Class), Keyboard Wedge, Wand Emulation

Scan Engine Options

HP - High Performance Area Imager (EA30)
2D - Standard Area Imager (EA20x)
1D - Linear Imager (EV10)
L - Standard Range Laser (EL20)

Scan Range

Typical reading distances at 200 lux

Linear SR61T1D

Symbology	Density	Minimum Distance	Maximum Distance
Code 39	0.1 mm (3.8 mils)	10 cm (3.94 in)	14 cm (5.51 in)
	0.125 mm (5 mils)	9 cm (3.54 in)	17.5 cm (6.89 in)
	0.25 mm (10 mils)	5.5 cm (2.17 in)	26 cm (10.24 in)
	0.5 mm (20 mils)	4 cm (1.57 in)	35 cm (13.78 in)
	1 mm (40 mils)	7.5 cm (2.95 in)	49 cm (19.29 in)
EAN/UPC	0.33 mm (13 mils)	5.2 cm (2.05 in)	28.5 cm (11.22 in)

Laser SR61TL

Symbology	Density	Minimum Distance	Maximum Distance
Code 39	0.125 mm (5 mils)	10 cm (3.94 in)	19.5 cm (7.68 in)
	0.5 mm (20 mils)	6 cm (2.36 in)	85 cm (33.46 in)
	1.3 mm (51 mils)	41* cm (16.14 in)	150 cm (59.1 in)
EAN/UPC	0.33 mm (13 mils)	4.5 cm (1.77 in)	49 cm (19.29 in)

*Depends on symbology length and scan angle.

North America

Corporate Headquarters
6001 36th Avenue West
Everett, Washington 98203
Phone: (425) 348-2600
Fax: (425) 355-9551

North Latin America

Headquarters Office
Mexico
Phone: +52 55 52-41-48-00
Fax: +52 55 52-11-81-21

South Latin America

Headquarters Office
Brazil
Phone: +55 11 5502.6770
Fax: +55 11 5502.6780

Europe/Middle East &

Africa Headquarters Office
Reading, United Kingdom
Phone: +44 118 923 0800
Fax: +44 118 923 0801

Asia Pacific

Headquarters Office
Singapore
Phone: +65 6303 2100
Fax: +65 6303 2199

2D SR61T2D

Symbology	Density	Minimum Distance	Maximum Distance
Code 39	0.15 mm (6 mils)	15.5 cm (6.10 in)	22 cm (8.66 in)
	0.2 mm (8 mils)	11.5 cm (4.53 in)	31 cm (12.20 in)
	0.25 mm (10 mils)	9 cm (3.54 in)	41 cm (16.14 in)
	0.5 mm (20 mils)	8 cm (3.15 in)	76 cm (29.92 in)
	1 mm (40 mils)	13 cm (5.12 in)	120 cm (47.24 in)
EAN/UPC	0.33 mm (13 mils)	9 cm (3.54 in)	48 cm (18.9 in)
PDF417	0.17 mm (6.6 mils)	14.5 cm (5.71 in)	22 cm (8.66 in)
	0.25 mm (10 mils)	9 cm (3.54 in)	36 cm (14.17 in)
	0.38 mm (15 mils)	10 cm (3.94 in)	52 cm (20.47 in)
DataMatrix	.025 mm (10 mils)	13 cm (5.12 in)	29 cm (11.42 in)

2D SR61THP

Symbology	Density	Minimum Distance	Maximum Distance
Code 39	0.125 mm (5 mils)	8 cm (3.15 in)	14 cm (5.51 in)
	0.5 mm (20 mils)	7 cm (2.76 in)	46 cm (18.11 in)
	1 mm (40 mils)	9.5 cm (3.74 in)	70 cm (27.56 in)
EAN/UPC	0.33 mm (13 mils)	6 cm (2.36 in)	32 cm (12.6 in)
PDF417	0.25 mm (10 mils)	5.5 cm (2.17 in)	26 cm (10.24 in)
	0.38 mm (15 mils)	6.5 cm (2.56 in)	36 cm (14.17 in)
DataMatrix	.025 mm (10 mils)	6 cm (2.36 in)	21 cm (8.27 in)

Internet

www.intermec.com
Worldwide Locations:
www.intermec.com/locations

Sales

Toll Free NA: (800) 934-3163
Toll in NA: (425) 348-2726
Freephone ROW:
00 800 4488 8844
Toll ROW: +44 134 435 0296

OEM Sales

Phone: (425) 348-2762

Media Sales

Phone: (513) 874-5882

Customer Service

and Support
Toll Free NA: (800) 755-5505
Toll in NA: (425) 356-1799

Supported Bar Code Symbolologies

for 1D and Laser Models

Codabar; Codablock A*; Codablock F*;
Code 11; Code 39; Code 93/93i;
Code 128/GSI-128; EAN/UPC;
GSI Composite*; GSI DataBar Expanded*;
GSI DataBar Limited*;
GSI DataBar OmniDirectional*;
GSI DataBar Stacked*; Interleaved 2 of 5; Matrix 2 of 5; Micro PDF417*;
MSI; PDF417*; Plessey; Standard 2 of 5; Telepen; TLC 39
*These symbolologies are only available with SR61TL (laser scanner).

Supported Bar Code Symbolologies

for 2D and HP Models

Australian Post; Aztec; BPO; Canada Post; Codabar;
Clodablock A; Codablock F; Code 11; Code 39;
Code 93/93i; Code 128/GSI-128; DataMatrix; Dutch Post; EAN/UPC; GSI Composite; GSI DataBar; Expanded; GSI DataBar Limited; GSI DataBar Omni-Directional; GSI DataBar Stacked; Infomail' Intelligent mail; Interleaved 2 of 5; Japan Post; Matrix 2 of 5; Maxicode; Micro PDF417; MSI; Multicode; PDF417; Planet; Plessey; Postnet; QR Code; Standard 2 of 5; Sweden Post; Telepen; TLC 39

Environment

Operating Temperature: -20°C to +50°C (-4°F to +122°F)

Storage Temperature: -40°C to +70°C (-40°F to +158°F)

Humidity: 5% to 95% RH, Non-condensing

Shock: 2000G

Vibration: 8G from 10Hz to 500Hz, 2hr/axis, 3 axes

Rain and Dust Resistance: IP54

Drop Survival: 26 drops onto concrete or steel surface from a height of 1.98 meters (6.5 feet)


Ambient light: Works in any lighting conditions from 0 to 100,000 lux

Accessories

Desktop Holder
Wall Mount/Vehicle Holder
Hands Free Stand
Belt Holster
Dangle Suspension
Wrist Strap (Lanyard)

Regulatory Approvals

SR61THP & SR61TL & SR61T2D Laser Class 2 product; SR61T1D Laser Class 1; CISPR 22 Class B; Part 15 of FCC rules, Class B; CE Mark (EU) (EN 55024, EN 55022 Class B, IEC 60950-1, IEC 60825-1); cULus (Canada and the USA) (UL 60950-1); GS Mark (Germany) (EN 60950-1, EN 60825-1); NOM (Mexico); C-TICK (Australia and New Zealand) (AS/NZS 3548 based on CISPR22); CQC (China)

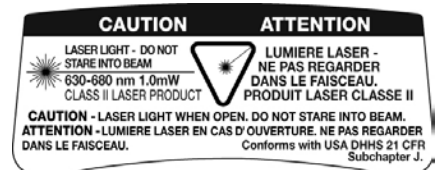

Copyright © 2010 Intermec Technologies Corporation. All rights reserved. Intermec is a registered trademark of Intermec Technologies Corporation. All other trademarks are the property of their respective owners. Printed in the U.S.A. 611734-011 10/10

In a continuing effort to improve our products, Intermec Technologies Corporation reserves the right to change specifications and features without prior notice.



Legacy Technology Services

We Rent & Sell All Types Of Barcode Equipment

Call now to talk to an expert

866-271-9891

www.LegacyGlobal.com

Some brands we carry



MOTOROLA

Intermec

DATALOGIC™

Honeywell

EQUINOX
PAYMENTS



About us

- Legacy Technology Services is a leading nationwide provider of mobile computing, barcode, printers and point of sale equipment and services.
- For over a decade, thousands of clients across North America have trusted us to provide equipment from leading manufacturers backed by the services to support them.

Latest Hardware from top manufacturers

- Legacy handles virtually every major manufacturer of mobile computing, barcoding and point of sale equipment.

Expert Repair and Maintenance services

- Legacy is one of the best repair facilities in North America

Discontinued product sourcing

- They don't make it anymore? Our inventory also includes manufacturer close-outs and discontinued equipment to support our clients legacy infrastructure.

Trade-in and Disposal services

- That old equipment laying around your facility may still have some value. Legacy routinely purchases equipment from our clients around the globe.
 - Data destruction
 - Hardware disposal
 - Auditing services

Dedicated client account team

- Dedicated, highly trained account managers are here to answer all your questions and provide top notch service.

Equipment rental services

- Sometimes renting is a better solution, Legacy's huge rental inventory provides the equipment you need for temporary needs and projects.



Legacy, Inc.

160 West Road,
Ellington, CT 06029

Toll Free: 866-271-9891

Fax: 888-522-4684