

\Orchestrating a brighter world

NEC

47", 55" and 75" LED-backlit, high-brightness LCD displays
ideal for high ambient light installations


NEC LCD High Brightness Displays



High brightness panels, extended runtimes and superior engineering make these displays ideal for high ambient light installations such as quick serve restaurant menuboard or front window facing signage

High Brightness, High Temperature Panel

The X754HB, X554HB and X474HB are designed with a brightness that can be seen in applications where the highest amount of ambient light is present. This includes areas where the sun will be a factor and could possibly tarnish the image on the display including indoor retail shop windows or outdoor types of applications when coupled with outdoor enclosures. While traditional televisions or even mainstream commercial displays range from 200 to 700 cd/m² of brightness, the NEC X-HB lineup ranges from 2000 to 2700 cd/m² which is more than enough for crystal clear visibility during all times of day. On top of this, these panels have a higher resistance to the "blackening effect" often produced by direct sunlight on a liquid crystal panel. This is due to a higher temperature transition necessary to make the liquid crystals change from nematic to isotropic.

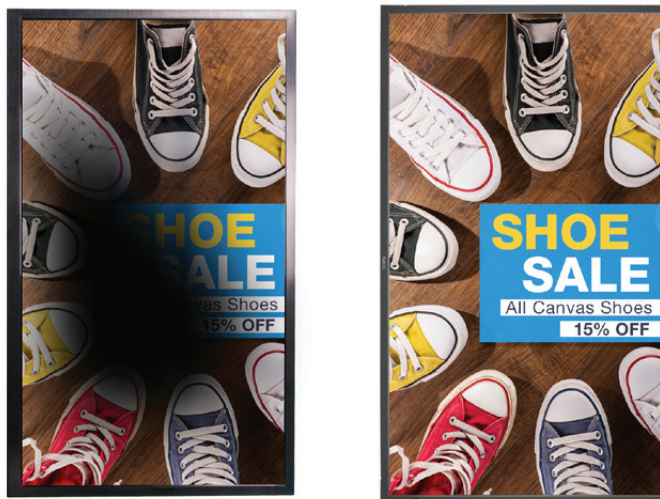

The NEC X474HB and X754HB contain a high TNi panel to reduce the blackening affect when in direct sunlight.

Quarter Lambda Polarizer Film


Conventional displays have panels that, when turned into portrait orientation, will have their light blocked by polarizing filters - such as certain sunglasses. The NEC X-HB series contains a special quarter lambda polarizer film that allows light to exit the panel in a way that the content will be clearly seen on the display regardless of orientation or polarized sunglasses.



Even when a customer is wearing polarized sunglasses, the X-HB series will maintain perfect visibility

Advanced Heat Management


Monitoring and managing the temperature of each display is crucial to secure reliability and longevity. An industrial-strength, premium-grade panel with additional thermal protection, internal temperature sensors with self-diagnostics, and fan-based technology allows for 24/7 operation, and protects your display investment.

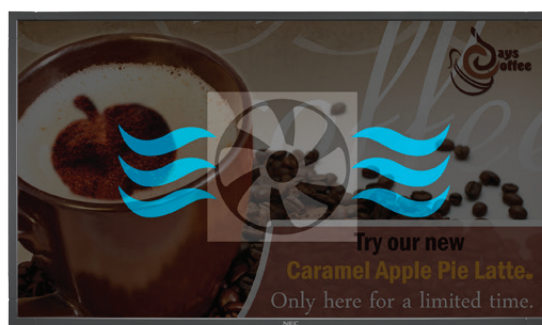

Without heat management, the displays could retain harmful heat within the chassis and behind the panel. This damaging heat will lower the picture quality and life expectancy of the product. However, NEC's advanced heat management ensures active heat dissipation through a fan based technology. Integrated cooling fans automatically turn on and stay on when high internal temperatures are detected. These will stay on until the heat is properly dissipated and the display remains under proper temperature thresholds.

Human Sensor and Ambient Light Sensor

This new optional human (motion) sensor accessory (KT-RC2) helps to deliver creative digital signage to end users by allowing for dynamic control of brightness, audio and source inputs while saving operating costs. Auto dimming adjusts the backlight of the LCD automatically depending on the amount of ambient light.

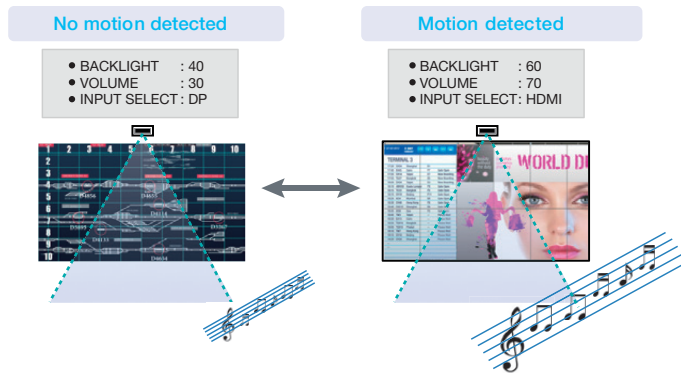

Intelligent Wireless Data Function

The built-in near field communication (NFC) chip allows data to be read and written via a mobile phone or tablet PC. Users can significantly reduce installation costs as displays can be easily configured and serviced using the NEC NFC Android app. This is extremely useful for larger rollouts as it can be utilized even when the display is powered off.



NaViSet Administrator 2

This software is an all-in-one remote support solution that runs from a central location and provides monitoring, asset management and control functionality of the majority of NEC display devices and Windows computers. It is ideal for multi-device installations over larger infrastructures.




Dedicated Color Calibration Software

As the brightness and color temperature of the LCD change with time, colors may not match across multiple screens. The NEC Display Wall Calibrator software ensures color uniformity and fidelity across multiple screens, creating a perfectly matched image in menuboard or tiled environments.

NEC Display Wall Calibrator

Expansion slots

The NEC HB displays support Intel's Open Pluggable Specification (OPS), and interface expansion slots to provide the flexibility customers need.



Proof of Play

This function provides accurate proof that displays are working as established when checking from an external location. Information regarding video source, time on, audio source and more can be pulled through the display when coupled with NaViSet Administrator 2.

Other Useful Features and Functions

- Landscape/portrait capable
- Scheduler with real-time clock
- Intelligent power management system
- Power on delay
- Screen saver function
- Aspect ratio control
- Memo function
- Carbon footprint meter
- PIP, PBP and Side by Side options
- Built in speakers
- Point zoom
- Control lock function
- 6-axis color adjustments and sRGB standard
- Advanced video settings (Noise reduction, adaptive contrast)
- Color temperature adjustment
- Programmable gamma setting (3 settings)
- DICOM simulation
- Plug and play (DDC/CI, DDC2B)
- HDCP (High-bandwidth Digital Content Protection) through certain inputs
- Ethernet and RS-232C control and communication
- CRESTRON ROOMVIEW™
- AMX Discovery HTTP server
- PJLink
- Self-diagnosis
- Status log function
- Firmware update over LAN
- Metal rear cabinet with VESA Standard Mounting Interface
- Carrying Handles for ease of installation


MODEL	X474HB	X554HB	X754HB
LCD MODULE			
Panel Technology	S-IPS	SPVA	SPVA
Viewable Image Size	47"	55"	75"
Native Resolution	1920 x 1080		
Brightness (Typical/Max)	1600 cd/m ² / 2000 cd/m ²	2000 cd/m ² / 2700 cd/m ²	2000 cd/m ² / 2500 cd/m ²
Contrast Ratio (Typical)	1300:1	5000:1	3000:1
Viewing Angle	178° Vert., 178° Hor. (89U/89D/89L/89R) @ CR>10		
Aspect Ratio	16:9		
Displayable Colors	More than 1.07 billion (10-bit)	More than 16.7 million (8-bit)	
Orientation	Landscape/Portrait		
CONNECTIVITY			
PC/Mac Signal Compatibility	Yes		
Input Terminals	DisplayPort, HDMI, DVI-D		
Analog	VGA 15-pin D-sub		
Audio	Audio Mini-Jack, DisplayPort Audio, HDMI Audio		
External Control	RS-232C, LAN, DDC/CI		
Output Terminals	DisplayPort (DisplayPort, HDMI, DVI-D or Option Signals out of this port)		
Digital	n/a		
Analog	Audio Mini-Jack, External Speaker Jack (2), HDMI Audio (through DisplayPort Out), DisplayPort Audio		
Audio	LAN		
External Control			
POWER CONSUMPTION			
On (Typical)	190W	310W	540W
Power Management	<2W	<2.5W	<2.5W
Current Rating	4.2A @ 100 - 120V, 1.7A @ 220 - 240V	6.3A @ 100-120V ; 2.4A @ 220-240V	9.7A @ 100 - 120V, 3.4A @ 220 - 240V
PHYSICAL SPECIFICATIONS			
Bezel Width (L/R, T/B)	19.3mm/19.3mm, 19.3mm/19.3mm	19.5mm/19.5mm, 19.5mm/19.5mm	
Net Dimensions (without stand; WxHxD)	42.7 x 24.7 x 5.8 in. ; 1083.8 x 628.2 x 146.7mm	49.4 x 28.5 x 5.4 in. ; 1253.6 x 724.4 x 137.7mm	66.7 x 38.3 x 5.8 in. ; 1694.4 x 972.4 x 146.2mm
Net Weight (without stand)	58.4lbs. / 26.5kg	71.9lbs / 32.6kg	127.7lbs / 57.9kg
VESA Hole Configuration	400 x 400mm (M6 x 4)		400 x 400 (M8 x 4)
ENVIRONMENTAL CONDITIONS			
Operating Temperature	41-104°F / 5-40°C		
Operating Humidity	20 - 80%		
Operating Altitude	13,780 ft. / 4200m		
LIMITED WARRANTY			
	3 year parts and labor including backlight		
ADDITIONAL FEATURES			
	Localized Dimming (X474HB), Direct LED Backlighting, Quarter Lambda Polarizer Film, High TNi Panel, Integrated Temperature Sensors and Dual Thermodynamic Cooling Fans, Ethernet Control and Communication, LAN Daisy Chain, RS-232 Control and Communication, Landscape/Portrait Capable, Full 24/7 Scheduler Function, Optional Human Sensor, NFC Capable with Intelligent Wireless Data App, Interface Expansion Slot, DisplayPort 1.2 Daisy Chain for UHD Loophrough Capabilities, Metal Rear Chassis, Carrying Handles, Programmable Gamma Correction, OPS Expansion Slot		
SHIPS WITH			
	Power Cable, 1.8m DVI Cable, Setup Manual, CD-ROM, Thumbscrew for Optional Stand, Wireless Remote Control, Batteries		
Optional Accessories			
	Stand (ST-4620 for X474HB, ST-5220 for X554HB, ST-801 for X754HB), Front-Firing 15W x 2 Speakers (SP-TF1), Side-Firing 15W x 2 Speakers (SP-RM1), IR Remote Control/Human Sensor Kit (KT-RC2), All OPS Option Cards, All Interface Expansion Boards (SB3-AB1, SB3-AB2, SB3-DB1), Display Wall Calibrator Kit (KT-LFD-CC)		

Input Panel

- | | |
|------------------------------|------------------------|
| 1. Vacation Switch | 7. RS-232C In |
| 2. External Speaker Terminal | 8. Remote In |
| 3. Audio Mini Jack Out | 9. VGA D-Sub In |
| 4. USB Service Port | 10. DisplayPort In/Out |
| 5. LAN Ports | 11. HDMI In |
| 6. Audio Mini Jack In | 12. DVI-D In |



Dimensions

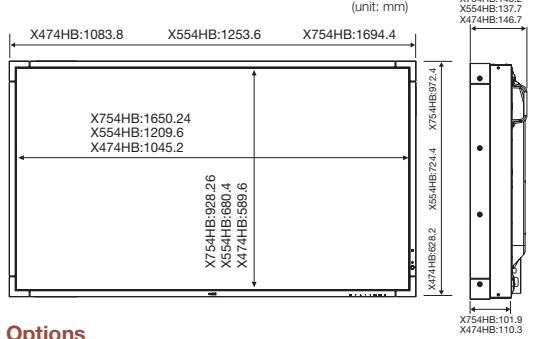

Options

OPS PC's

OPS-DRD

OPS-PCAEQ-PS/PH

OPS-PCIB-PS



SDI

HD-SDI

SB-01HC

3G-SDI

SB-04HC



HDBaseT

SB-07BC



Interface Extension Board

Digital Video

SB3-DB1

Analog Video

SB3-AB1

Analog Video

SB3-AB2



Sensor Kit

Human (Motion) / Ambient Light / IR Remote

KT-RC2



Stand

X474HB

ST-4620

X554HB

ST-5220

X754HB

ST-801



Speaker

SP-RM1

SP-TF1



Wall Mount

X474HB

WMK-3257

X554HB

WMK-3257

X754HB

WMK-6598



MultiSync, NaViSet, TileMatrix and Frame Comp are trademarks or registered trademarks of NEC Display Solutions, Ltd. in Japan, the United States and other countries.
The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.
DisplayPort and DisplayPort Compliance Logo are trademarks owned by the Video Electronics Standards Association in the United States and other countries.
HDBaseT™ and the HDBaseT Alliance logo are trademarks of the HDBaseT Alliance.
CRESTRON and CRESTRON ROOMVIEW are trademarks or registered trademarks of Crestron Electronics, Inc.
AMX is a trademark or registered trademark of AMX in the United States and other countries.
Trademark PULink is a trademark applied for trademark rights in Japan, the United States and other countries and areas.
VESA is a trademark of a nonprofit organization, Video Electronics Standard Association.
All other trademarks are the property of their respective owners. The images in this brochure are samples.
All specifications are subject to change without notice. April 2016

Legacy Technology Services

We Rent & Sell All Types Of Barcode Equipment

Call now to talk to an expert

866-271-9891

www.LegacyGlobal.com

Some brands we carry



MOTOROLA

Intermec

DATALOGIC™

Honeywell

EQUINOX
PAYMENTS



About us

- Legacy Technology Services is a leading nationwide provider of mobile computing, barcode, printers and point of sale equipment and services.
- For over a decade, thousands of clients across North America have trusted us to provide equipment from leading manufacturers backed by the services to support them.

Latest Hardware from top manufacturers

- Legacy handles virtually every major manufacturer of mobile computing, barcoding and point of sale equipment.

Expert Repair and Maintenance services

- Legacy is one of the best repair facilities in North America

Discontinued product sourcing

- They don't make it anymore? Our inventory also includes manufacturer close-outs and discontinued equipment to support our clients legacy infrastructure.

Trade-in and Disposal services

- That old equipment laying around your facility may still have some value. Legacy routinely purchases equipment from our clients around the globe.
 - Data destruction
 - Hardware disposal
 - Auditing services

Dedicated client account team

- Dedicated, highly trained account managers are here to answer all your questions and provide top notch service.

Equipment rental services

- Sometimes renting is a better solution, Legacy's huge rental inventory provides the equipment you need for temporary needs and projects.



Legacy, Inc.

160 West Road,
Ellington, CT 06029

Toll Free: 866-271-9891

Fax: 888-522-4684