


32"




| L32LA50W53A        |              |
|--------------------|--------------|
| Screen Size        | 32"          |
| Resolution (Pixel) | 1366 x 768   |
| Display Colors     | 16.7 million |

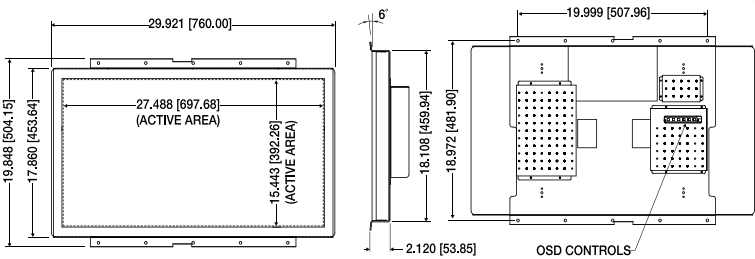

42"



| L42MD50W73A        |              |
|--------------------|--------------|
| Screen Size        | 42"          |
| Resolution (Pixel) | 1920 x 1080  |
| Display Colors     | 16.7 million |

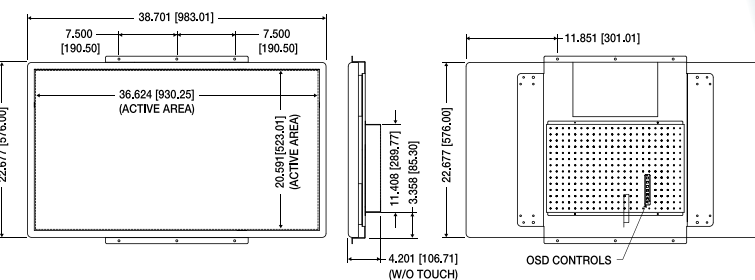


Different frames are available for all models, please contact our sales department for details. Product specifications are subject to change without notice.

|                                |                             |
|--------------------------------|-----------------------------|
| Contrast Ratio                 | 600:1                       |
| Response Time (Tr/Tf)          | 9ms                         |
| Luminance (cd/m <sup>2</sup> ) | 500                         |
| Viewing Angle (T/D/L/R)        | 89/89/89/89                 |
| Input Signal                   | VGA Analog RGB              |
|                                | DVI Optional                |
| Power Input (AC)               | 100 - 240V                  |
| Power Consumption              | <120W (TYP)                 |
| Backlight                      | Lifetime (hrs) 50,000 (TYP) |
| Operating Conditions           | Temperature 0° - 45°C       |
|                                | Humidity 20% - 80%          |
| Touchscreen Available          | Yes                         |

37"




| L37LD50W53A        |              |
|--------------------|--------------|
| Screen Size        | 37"          |
| Resolution (Pixel) | 1366 x 768   |
| Display Colors     | 16.7 million |

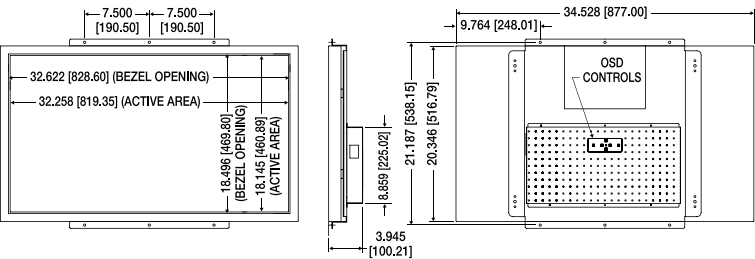

47"



| L47LD50W73A        |              |
|--------------------|--------------|
| Screen Size        | 47"          |
| Resolution (Pixel) | 1920 X 1080  |
| Display Colors     | 16.7 million |

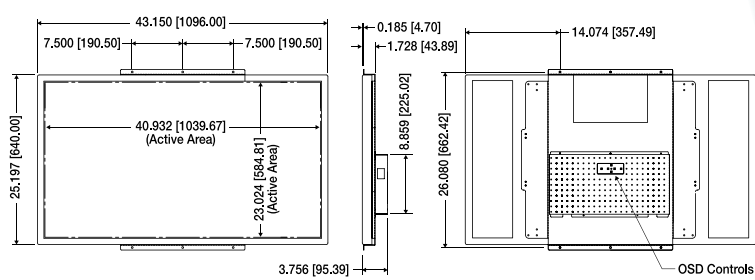

|                                |                             |
|--------------------------------|-----------------------------|
| Contrast Ratio                 | 800:1                       |
| Response Time (Tr/Tf)          | 7/9ms                       |
| Luminance (cd/m <sup>2</sup> ) | 500                         |
| Viewing Angle (T/D/L/R)        | 88/88/88/88                 |
| Input Signal                   | VGA Analog RGB              |
|                                | DVI Yes                     |
| Power Input (AC)               | 100 - 240V                  |
| Power Consumption              | <150W (TYP)                 |
| Backlight                      | Lifetime (hrs) 50,000 (TYP) |
| Operating Conditions           | Temperature 0° - 45°C       |
|                                | Humidity 20% - 80%          |
| Touchscreen Available          | N/A                         |

High Performance,  
Quality &  
Reliability



LCD

OPEN FRAME  
MONITORS

Gaming Application  
Kiosk/Public Display Application

Teddy T.  
Robin Tsou  
Darneel Joe

email: sthamron@tatungusa.com  
email: rtsou@tatungusa.com  
email: djoe@tatungusa.com

Tel: (800) 829-2850 ext.109  
Tel: (800) 829-2850 ext.206 (West Coast)  
Tel: (800) 829-2850 ext.245 (East Coast)



For Gaming, Industrial & Commercial Applications:



## OPEN FRAME MONITORS


6.3"



### L63NA25A

|                    |              |
|--------------------|--------------|
| Screen Size        | 6.3"         |
| Resolution (Pixel) | 1024 x 768   |
| Display Colors     | 16.2 million |

|                         |                             |
|-------------------------|-----------------------------|
| Contrast Ratio          | 500:1                       |
| Response Time (Tr/Tf)   | 6ms                         |
| Luminance (cd/m²)       | 250                         |
| Viewing Angle (T/D/L/R) | 45/60/60/60                 |
| Input Signal            | VGA Analog RGB              |
|                         | DVI Optional                |
| Power Input (AC)        | 12V                         |
| Power Consumption       | 4.9W (TYP)                  |
| Backlight               | Lifetime (hrs) 20,000 (TYP) |
| Operating               | Temperature 0° - 45°C       |
| Conditions              | Humidity 20% - 80%          |
| Touchscreen Available   | 3M Capacitive               |

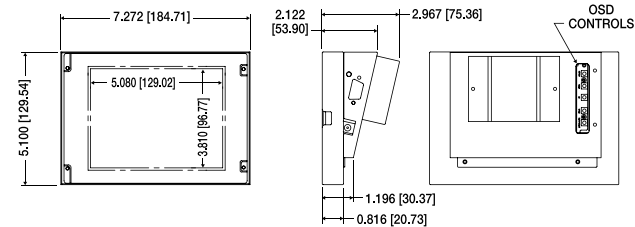


6.4"



### L64LA25LB

|                    |           |
|--------------------|-----------|
| Screen Size        | 6.4"      |
| Resolution (Pixel) | 640 x 480 |
| Display Colors     | 262k      |

|                         |                             |
|-------------------------|-----------------------------|
| Contrast Ratio          | 300:1                       |
| Response Time (Tr/Tf)   | 10/15ms (TYP)               |
| Luminance (cd/m²)       | 250                         |
| Viewing Angle (T/D/L/R) | 40/55/60/60                 |
| Input Signal            | VGA Analog RGB              |
|                         | DVI N/A                     |
| Power Input (AC)        | 12V                         |
| Power Consumption       | <8W (TYP)                   |
| Backlight               | Lifetime (hrs) 20,000 (TYP) |
| Operating               | Temperature 0° - 45°C       |
| Conditions              | Humidity 20% - 80%          |
| Touchscreen Available   | 3M Capacitive               |

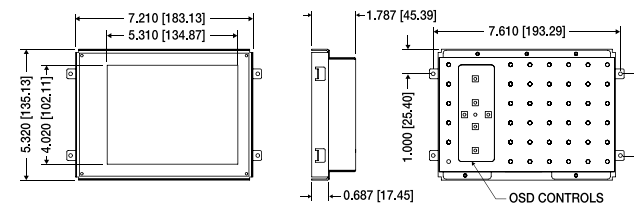


10.4"



### VT10S-K

|                    |           |
|--------------------|-----------|
| Screen Size        | 10.4"     |
| Resolution (Pixel) | 800 x 600 |
| Display Colors     | 262k      |

|                         |                             |
|-------------------------|-----------------------------|
| Contrast Ratio          | 400:1                       |
| Response Time (Tr/Tf)   | 6/19ms                      |
| Luminance (cd/m²)       | 250                         |
| Viewing Angle (T/D/L/R) | 45/55/65/65                 |
| Input Signal            | VGA Analog RGB              |
|                         | DVI N/A                     |
| Power Input (AC)        | 12V                         |
| Power Consumption       | <15W (TYP)                  |
| Backlight               | Lifetime (hrs) 20,000 (TYP) |
| Operating               | Temperature 0° - 45°C       |
| Conditions              | Humidity 20% - 80%          |
| Touchscreen Available   | Yes                         |

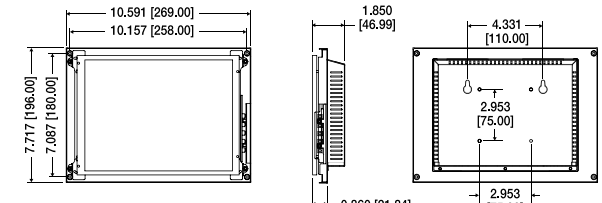


12.1"



### VT12MS-K

|                    |           |
|--------------------|-----------|
| Screen Size        | 12.1"     |
| Resolution (Pixel) | 800 x 600 |
| Display Colors     | 262k      |

|                         |                             |
|-------------------------|-----------------------------|
| Contrast Ratio          | 300:1                       |
| Response Time (Tr/Tf)   | 25/25ms                     |
| Luminance (cd/m²)       | 400                         |
| Viewing Angle (T/D/L/R) | 80/80/80/80                 |
| Input Signal            | VGA Analog RGB              |
|                         | DVI Optional                |
| Power Input (AC)        | 12V                         |
| Power Consumption       | <12W (TYP)                  |
| Backlight               | Lifetime (hrs) 50,000 (TYP) |
| Operating               | Temperature 0° - 45°C       |
| Conditions              | Humidity 20% - 80%          |
| Touchscreen Available   | Yes                         |

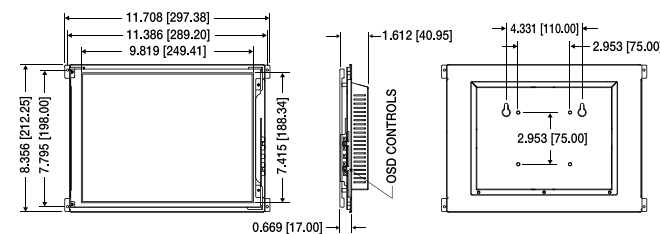

15"




### L15LD30H1

|                    |              |
|--------------------|--------------|
| Screen Size        | 15"          |
| Resolution (Pixel) | 1024 x 768   |
| Display Colors     | 16.2 million |

|                         |                             |
|-------------------------|-----------------------------|
| Contrast Ratio          | 550:1                       |
| Response Time (Tr/Tf)   | 2/6ms                       |
| Luminance (cd/m²)       | 300                         |
| Viewing Angle (T/D/L/R) | 45/55/65/65                 |
| Input Signal            | VGA Analog RGB              |
|                         | DVI Optional                |
| Power Input (AC)        | 12V                         |
| Power Consumption       | <25W (TYP)                  |
| Backlight               | Lifetime (hrs) 40,000 (TYP) |
| Operating               | Temperature 0° - 45°C       |
| Conditions              | Humidity 20% - 80%          |
| Touchscreen Available   | Yes                         |

Additional 15" L15LA25H1 available

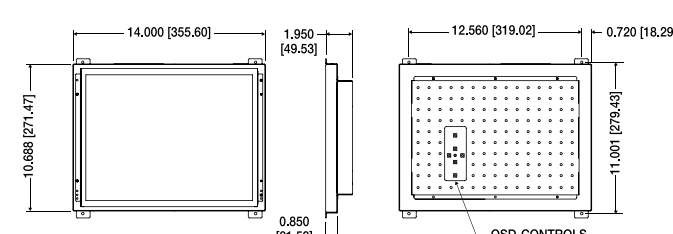

17"




### L17CD30A01

|                    |              |
|--------------------|--------------|
| Screen Size        | 17"          |
| Resolution (Pixel) | 1280 x 1024  |
| Display Colors     | 16.2 million |

|                         |                             |
|-------------------------|-----------------------------|
| Contrast Ratio          | 500:1                       |
| Response Time (Tr/Tf)   | 3/5ms                       |
| Luminance (cd/m²)       | 300                         |
| Viewing Angle (T/D/L/R) | 67/63/70/70                 |
| Input Signal            | VGA Analog RGB              |
|                         | DVI Optional                |
| Power Input (DC)        | 12V                         |
| Power Consumption       | <35W (TYP)                  |
| Backlight               | Lifetime (hrs) 30,000 (TYP) |
| Operating               | Temperature 0° - 45°C       |
| Conditions              | Humidity 20% - 80%          |
| Touchscreen Available   | Yes                         |

Additional 17" L17CA25A01 available

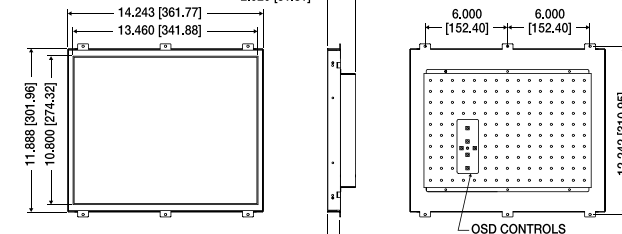


19"



### L19AD30A07

|                    |              |
|--------------------|--------------|
| Screen Size        | 19"          |
| Resolution (Pixel) | 1280 x 1024  |
| Display Colors     | 16.7 million |

|                         |                             |
|-------------------------|-----------------------------|
| Contrast Ratio          | 1300:1                      |
| Response Time (Tr/Tf)   | 15/5ms                      |
| Luminance (cd/m²)       | 300                         |
| Viewing Angle (T/D/L/R) | 89/89/89/89                 |
| Input Signal            | VGA Analog RGB              |
|                         | DVI Optional                |
| Power Input (DC)        | 12V                         |
| Power Consumption       | <40W (TYP)                  |
| Backlight               | Lifetime (hrs) 50,000 (TYP) |
| Operating               | Temperature 0° - 45°C       |
| Conditions              | Humidity 20% - 80%          |
| Touchscreen Available   | Elo Capacitive              |

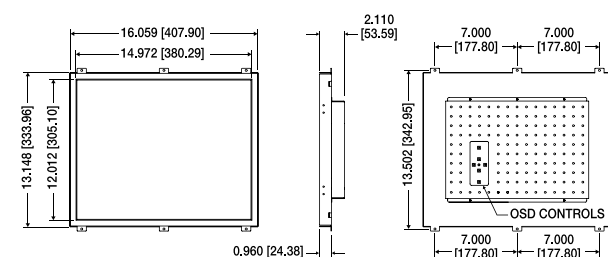


20"



### L20LA41W53A03

|                    |              |
|--------------------|--------------|
| Screen Size        | 20.1"        |
| Resolution (Pixel) | 1366 x 768   |
| Display Colors     | 16.7 million |

|                         |                             |
|-------------------------|-----------------------------|
| Contrast Ratio          | 600:1                       |
| Response Time (Tr/Tf)   | 8/9ms                       |
| Luminance (cd/m²)       | 410                         |
| Viewing Angle (T/D/L/R) | 89/89/89/89                 |
| Input Signal            | VGA Analog RGB              |
|                         | DVI Optional                |
| Power Input (AC)        | 100 - 240V                  |
| Power Consumption       | <65W (TYP)                  |
| Backlight               | Lifetime (hrs) 50,000 (TYP) |
| Operating               | Temperature 0° - 45°C       |
| Conditions              | Humidity 20% - 80%          |
| Touchscreen Available   | Optional                    |

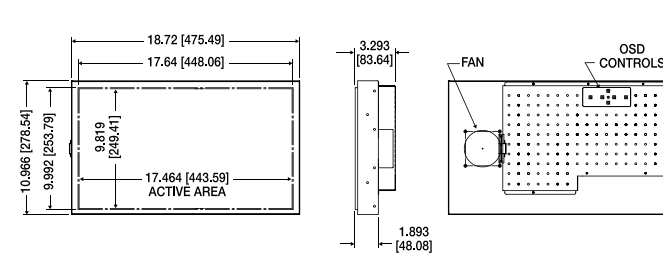


26"



### L26LD45W53A

|                    |              |
|--------------------|--------------|
| Screen Size        | 26"          |
| Resolution (Pixel) | 1366 x 768   |
| Display Colors     | 16.7 million |

|                         |                             |
|-------------------------|-----------------------------|
| Contrast Ratio          | 800:1                       |
| Response Time (Tr/Tf)   | 9/9ms                       |
| Luminance (cd/m²)       | 450                         |
| Viewing Angle (T/D/L/R) | 89/89/89/89                 |
| Input Signal            | VGA Analog RGB              |
|                         | DVI Optional                |
| Power Input (AC)        | 100 - 240V                  |
| Power Consumption       | <90W (TYP)                  |
| Backlight               | Lifetime (hrs) 50,000 (TYP) |
| Operating               | Temperature 0° - 45°C       |
| Conditions              | Humidity 20% - 80%          |
| Touchscreen Available   | Yes                         |

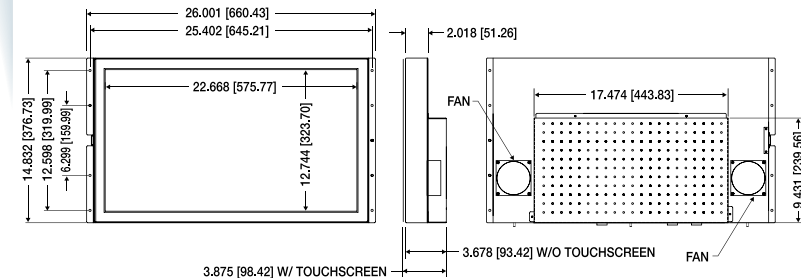



# Legacy Technology Services

**We Rent & Sell All Types Of Barcode Equipment**

Call now to talk to an expert

**866-271-9891**

[www.LegacyGlobal.com](http://www.LegacyGlobal.com)

Some brands we carry



MOTOROLA

**Intermec**

**DATALOGIC**™

**Honeywell**

**EQUINOX**  
PAYMENTS



## About us

- Legacy Technology Services is a leading nationwide provider of mobile computing, barcode, printers and point of sale equipment and services.
- For over a decade, thousands of clients across North America have trusted us to provide equipment from leading manufacturers backed by the services to support them.

## Latest Hardware from top manufacturers

- Legacy handles virtually every major manufacturer of mobile computing, barcoding and point of sale equipment.

## Expert Repair and Maintenance services

- Legacy is one of the best repair facilities in North America

## Discontinued product sourcing

- They don't make it anymore? Our inventory also includes manufacturer close-outs and discontinued equipment to support our clients legacy infrastructure.

## Trade-in and Disposal services

- That old equipment laying around your facility may still have some value. Legacy routinely purchases equipment from our clients around the globe.
  - Data destruction
  - Hardware disposal
  - Auditing services

## Dedicated client account team

- Dedicated, highly trained account managers are here to answer all your questions and provide top notch service.

## Equipment rental services

- Sometimes renting is a better solution, Legacy's huge rental inventory provides the equipment you need for temporary needs and projects.



[Legacy, Inc.](http://Legacy, Inc.)

160 West Road,  
Ellington, CT 06029

Toll Free: 866-271-9891

Fax: 888-522-4684