SPECIFICATIONS

1500 series scanner

Fast and reliable


Linear Imager	Laser	2D Imager

Category	Corded	1500, 1500WA	1502	1504	
	Bluetooth cordless	1560	1562	1564	
RF Communication of	Module		Bluetooth Class 2 (2.4 GHz) Version 2.0		
Bluetooth scanner	Coverage		90 m1 / 295 ft. line of sight		
	Standard profile	SPP, HID			
Performance	Optical sensor	2500 pixels	Laser	752 x 480 pixels	
	Light source	Red LED 625 nm (1560: Red LED 618-626 nm)	Visable laser diode at 650 ± 15 nm	625 ±5 nm LEDs (2x)	
	Resolution	3 mil	4 mil	3 mil - 1D barcode / 5 mil - 2D barcode	
	Depth of field 13 mil barcode	0.5 to 35 cm / 0.2 to 13.8 in. (1500WA: long barcode 8.2 cm, 8 mil- 7.5 to 14.5cm / 3 to 5.7 in.)	2 to 57 cm / 0.8 to 22.4 in.	Code 39 3 mil: 6.9 to 10.7 cm / 2.7 to 4.2 it Code 39 5 mil: 3.6 to 18.5 cm / 1.4 to 7.3 it Code 39 7.5 mil: 0 to 25.1 cm / 0 to 9.9 in UPCA 13 mil: 4 to 30.5 cm / 1.6 to 12 in. Code 39 20mil: 0 to 50 cm / 0 to 19.7 in. PDF417 5 mil: 2.8 to 4.5 cm / 1.1 to 1.8 ir PDF417 10 mil: 4.8 to 17.5 cm / 1.9 to 6.9 PDF417 10 mil: 0 to 22.9 cm / 0 to 9 in. PDF417 15 mil: 0 to 29.7 cm / 0 to 11.7 in	
	Scanning angle	Pitch ± 70° Skew ± 70°	Pitch ± 65° Skew ± 50°	Pitch ±60° Skew±60°	
	PCS	Minimum 30%	Minimum 45%		
	Scan rate	200 scans, decodes / second (1500WA: 100 scans / second)	100 scans / second	60 frames / second	
	Ambient illumination		100,000 lux		
	Hands-free scanning	Auto-sense and continuous modes	Continuous mode	Auto-sense mode, continuous mode and presentation mode	
	Barcodes support	Codabar, Code 39, Code 93, Code 128, GS1 DataBar (RSS), Industrial 2 of 5, Interleave 2 of 5, ISBT-128, Italian and French Pharmacodes, Matrix 2 of 5, MSI, Plessey, Telepen, UPC/EAN/GS1-128, and more		1D: All major codes² 2D: PDF417, MicroPDF417, Composite, RS TLC-39, Datamatrix, QR code, Micro QR co Aztec, MaxiCode Postal Codes: US PostNet, US Planet, UK Postal, Australian Postal, Japan Postal Dutch Postal (KIX)	
	Programmable features	Data editing, interface selection, symbology configuration			
	Language support	US and UK English, French, Italian, Belgian, Norwegian/Swedish, Spanish, Portuguese, German, Japanese and Turkish			
Physical	Dimension L x W x H	15.3 x 6.1 x 9.3 cm / 6.0 x 2.4 x 3.7 in.			
,	Weight without cable / with battery	145 g / 5.1 oz. (1560: 173 g / 6.1 oz.)	1502: 149 g / 5.2 oz. 1562: 177 g / 6.2 oz.	1504: 154 g / 5.4 oz. 1564: 185 g / 6.5 oz.	
	Color	Black			
	Switch	Tactile Switch			
Electrical	Memory for Bluetooth scanner reserver buffer / batch mode	4 K / 512 K		10 K / 4 M	
	Working hours for Bluetooth scanner	24 / 12 hours depending on the CCD Sensor mode setting (Always Active function disabled/ Always Active function enabled, default setting)	24 hours based on 1 scans / 5 seconds	16 hours based on 1 scans / 5 seconds	
	Voltage		+5 V ±10% / 3.7 V 800 mAh Li-ion battery		
	Power consumption ³ Standby / Operating	50 mA / 265 mA (1560: 45 mA / 270 mA)	1502: 35 mA / 210 mA 1562: 25 mA / 210 mA	1504: 30 mA / 280 mA 1564: 35 mA / 230 mA	
User Environment	Temperature	Operating: 0°C to 50°C / 32°F to 122°F Storage: -20°C to 60°C / -4°F to 140°F			
OSEI EIIVIIOIIIIEII	Humidity		Operating: 10% to 90% Storage: 5% to 95%		
	Impact resistance	1.5 m (4.9 ft) multiple drops onto concrete (1560: 1.2 m (3.9 ft) multiple drops onto concrete)			
	Ingress protection	IP30			
	Electrostatic discharge	±8 kV contact ±15 kV air			
	EMC regulation	1500: BSMI, CE, C-tick, FCC, IC, MIC 1500WA: BSMI, CE, C-tick, FCC, IC 1560: BSMI, CE, C-tick, FCC, IC, KCC,	1502: CE, C-tick, FCC, IC 1562: BSMI, CE, C-tick, FCC, IC, KCC, NCC, SRMC, TELEC	1504: BSMI, CE, C-tick, FCC, IC 1564: BSMI, CE, C-tick, FCC, IC, NCC	
		NCC, SRMC, TELEC			
	Configuration		pased ScanMaster software, by direct connection	on or printing out barcode settings	
	Configuration Accessories	Setup options include Windows-k Three-way desk/wall/auto-sense		ation stand for Bluetooth scanner	

^{© 2011} CipherLab Co., Ltd. All specifications are subject to change without notice. All rights reserved. All brand, product and service, and trademark names are the property of their registered owners.





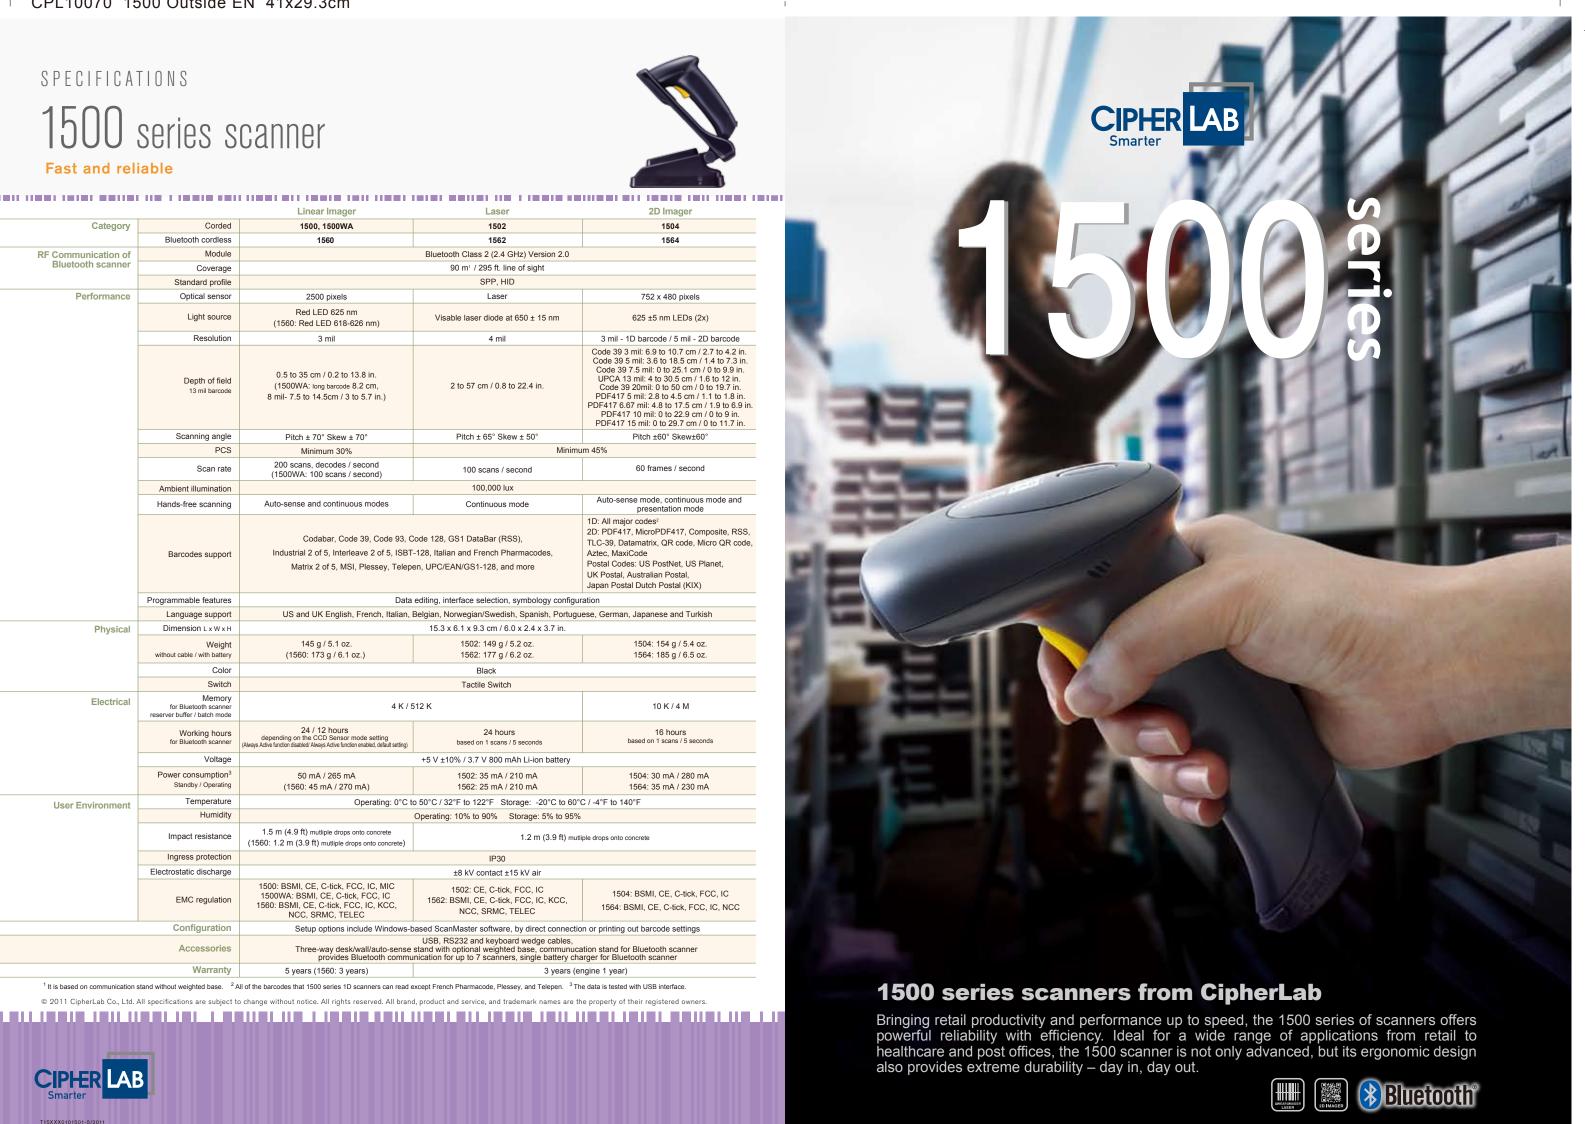

1500 series





1500 Series Scanners from CipherLab

Accelerate your business

Handheld scanners are much faster than human fingers. Pull the trigger and the work is done instantly: complete series, update inventories, check patient records, and record production line parts and activities. Handheld scanners accelerate work with error-free capture of critical information, keeping your company data up to date and up to the minute.

Cut costs

CipherLab scanners are versatile, agile, and priced right for long-lasting value. Your company benefits from years of use, backed by a manufacturer honored in the industry for its innovative, reliable products and customer service. The 1500 series scanners capture data from regular to long barcodes with a choice of linear imager, 2D imager, or laser. Together with Bluetooth cordless and corded applications, the 1500 series scanners help you run business more efficiently with improved operations.

Go where the work takes you

The 1500 series includes wireless scanners to unleash workers, so they can go where the work is and get more done, in more places. Our 1500 series Bluetooth scanners connect with the communication stand up to 90 meters (295 feet) away. Beyond that, they keep working by storing information until the scanner is back in range.

Smart solutions with immediate payoffs

Accelerate receiving with fast, reliable, low-cost CipherLab 1500 handheld scanners

European retail giant Valora deployed 1,100 CipherLab 1500 scanners to improve product receiving in its Swiss sales outlets. "After performing extensive tests, it was clear that the CipherLab scanner performed much better than any of the other solutions. We had no previous experience with CipherLab and were positively surprised with its error-free scans, reliability, and the convincing value for money it offers."

Christian Würger, Head of the Corporate IT Operation/ Support, Valora, Switzerland

Streamline tracking and delivery with wireless CipherLab Bluetooth scanners


To ensure better tracking and delivery of mail and goods, Brazil's ECT, the largest post office in Latin America, relies on the flexibility and productivity of CipherLab Bluetooth scanners.

"With the new scanners, employees can easily reach the items to scan. They can walk around outdoors and scan packages in the unloading/departing zones, allowing them to work faster and get more work done. And the database is always updated when they are back in wireless range."

Marcel Gomes, Complex Solutions Provider for ECT, Brazil.

Update stock and reply distribution requirements in real time with wireless CipherLab Bluetooth scanners

To ensure accurate CD/DVD replenishment, ASDA/Wal-Mart combines the wireless connectivity of CipherLab Bluetooth scanners and smart phones/PDAs to instantly send stocking requirements to the distribution center.



Altaf Sadique, CEO, Gane Data LTD., United Kingdom



Snappy scanning, speedy decoding

The 1500 series with linear imaging reader scan and decode barcodes up to 200 times per second to speed work, eliminate rescans and keep up with your fastest operation. This high speed delivered with low power consumption makes auto-sense scanning very effective.

Wireless freedom

Range of Operation

The 1500 series Bluetooth wireless scanners have a 90-meter line-of-sight range from the communication stand. If it's not in range, with the optional linear imager and laser scanners, the scanner's buffer memory holds up to 256 scans in reserve, ready to transmit automatically when you're back in range again. Or, use batch mode to record over 32,000 scans – that's freedom to roam widely. The 1500 Bluetooth scanner with 2D reader has a buffer memory of 10K or 4MB in batch mode.

House of Wireless Power

CipherLab offers you the multi-shift service with the 1500 series Bluetooth scanner. Without interruption of workflow, users get to finish work more productively and efficiently.

A Great Variety at Your Fingertips

Every business is different and has different scanning needs, which is why CipherLab have a broad range of scanners to suit any businesses whatever their needs. The 1500 series comes in a range of varieties. The linear imager scanner offers the option of reading long barcodes, for example the ones on bills, making it suitable for utility companies, banks, and collecting agencies. The option of 2D imager is good for scanning barcodes on medicine packaging or hospital equipments making them suited for pharmaceutical or hospitals.

PC Software to Custom-Configure Scanners to Any Environment

CipherLab **ScanMaster** software provides comprehensive tools to configure any scanner, such as enabling and disabling hands-free scanning, choosing edit format and symbology types, plus more. With ScanMaster, scanners can be easily customized to fit every working environment. ScanMaster for PC is included with all CipherLab scanners. In addition, 1500 series is also supported by **CipherConnect** which is a COM-to-key utility designed for CipherLab Bluetooth scanners to work as an input device for smart devices, such as Smartphone or PDA. The software enables intensive data collection and transmission via CipherLab Bluetooth scanner to the smart device.











1500 series







1500 Series Scanners from CipherLab

Accelerate your business

Handheld scanners are much faster than human fingers. Pull the trigger and the work is done instantly: complete series, update inventories, check patient records, and record production line parts and activities. Handheld scanners accelerate work with error-free capture of critical information, keeping your company data up to date and up to the minute.

Cut costs

CipherLab scanners are versatile, agile, and priced right for long-lasting value. Your company benefits from years of use, backed by a manufacturer honored in the industry for its innovative, reliable products and customer service. The 1500 series scanners capture data from regular to long barcodes with a choice of linear imager, 2D imager, or laser. Together with Bluetooth cordless and corded applications, the 1500 series scanners help you run business more efficiently with improved operations.

Go where the work takes you

The 1500 series includes wireless scanners to unleash workers, so they can go where the work is and get more done, in more places. Our 1500 series Bluetooth scanners connect with the communication stand up to 90 meters (295 feet) away. Beyond that, they keep working by storing information until the scanner is back in range.

Smart solutions with immediate payoffs

Accelerate receiving with fast, reliable, low-cost CipherLab 1500 handheld scanners

European retail giant Valora deployed 1,100 CipherLab 1500 scanners to improve product receiving in its Swiss sales outlets. "After performing extensive tests, it was clear that the CipherLab scanner performed much better than any of the other solutions. We had no previous experience with CipherLab and were positively surprised with its error-free scans, reliability, and the convincing value for money it offers."

Christian Würger, Head of the Corporate IT Operation/ Support, Valora, Switzerland

Streamline tracking and delivery with wireless CipherLab Bluetooth scanners


To ensure better tracking and delivery of mail and goods, Brazil's ECT, the largest post office in Latin America, relies on the flexibility and productivity of CipherLab Bluetooth scanners.

"With the new scanners, employees can easily reach the items to scan. They can walk around outdoors and scan packages in the unloading/departing zones, allowing them to work faster and get more work done. And the database is always updated when they are back in wireless range."

Marcel Gomes, Complex Solutions Provider for ECT, Brazil.

Update stock and reply distribution requirements in real time with wireless CipherLab Bluetooth scanners

To ensure accurate CD/DVD replenishment, ASDA/Wal-Mart combines the wireless connectivity of CipherLab Bluetooth scanners and smart phones/PDAs to instantly send stocking requirements to the distribution center.



Altaf Sadique, CEO, Gane Data LTD., United Kingdom

Snappy scanning, speedy decoding

The 1500 series with linear imaging reader scan and decode barcodes up to 200 times per second to speed work, eliminate rescans and keep up with your fastest operation. This high speed delivered with low power consumption makes auto-sense scanning very effective.

Wireless freedom

Range of Operation

The 1500 series Bluetooth wireless scanners have a 90-meter line-of-sight range from the communication stand. If it's not in range, with the optional linear imager and laser scanners, the scanner's buffer memory holds up to 256 scans in reserve, ready to transmit automatically when you're back in range again. Or, use batch mode to record over 32,000 scans – that's freedom to roam widely. The 1500 Bluetooth scanner with 2D reader has a buffer memory of 10K or 4MB in batch mode.

House of Wireless Power

CipherLab offers you the multi-shift service with the 1500 series Bluetooth scanner. Without interruption of workflow, users get to finish work more productively and efficiently.

A Great Variety at Your Fingertips

Every business is different and has different scanning needs, which is why CipherLab have a broad range of scanners to suit any businesses whatever their needs. The 1500 series comes in a range of varieties. The linear imager scanner offers the option of reading long barcodes, for example the ones on bills, making it suitable for utility companies, banks, and collecting agencies. The option of 2D imager is good for scanning barcodes on medicine packaging or hospital equipments making them suited for pharmaceutical or hospitals.

PC Software to Custom-Configure Scanners to Any Environment

CipherLab **ScanMaster** software provides comprehensive tools to configure any scanner, such as enabling and disabling hands-free scanning, choosing edit format and symbology types, plus more. With ScanMaster, scanners can be easily customized to fit every working environment. ScanMaster for PC is included with all CipherLab scanners. In addition, 1500 series is also supported by **CipherConnect** which is a COM-to-key utility designed for CipherLab Bluetooth scanners to work as an input device for smart devices, such as Smartphone or PDA. The software enables intensive data collection and transmission via CipherLab Bluetooth scanner to the smart device.











SPECIFICATIONS

1500 series scanner

Fast and reliable



		Linear Imager	Laser	2D Imager	
Category	Corded	1500, 1500WA	1502	1504	
	Bluetooth cordless	1560	1562	1564	
RF Communication of Bluetooth scanner	Module	Bluetooth Class 2 (2.4 GHz) Version 2.0			
	Coverage	90 m¹ / 295 ft. line of sight			
	Standard profile		SPP, HID		
Performance	Optical sensor	2500 pixels	Laser	752 x 480 pixels	
	Light source	Red LED 625 nm (1560: Red LED 618-626 nm)	Visable laser diode at 650 ± 15 nm	625 ±5 nm LEDs (2x)	
	Resolution	3 mil	4 mil	3 mil - 1D barcode / 5 mil - 2D barcode	
	Depth of field 13 mil barcode	0.5 to 35 cm / 0.2 to 13.8 in. (1500WA: long barcode 8.2 cm, 8 mil- 7.5 to 14.5cm / 3 to 5.7 in.)	2 to 57 cm / 0.8 to 22.4 in.	Code 39 3 mil: 6.9 to 10.7 cm / 2.7 to 4.2 in. Code 39 5 mil: 3.6 to 18.5 cm / 1.4 to 7.3 in. Code 39 7.5 mil: 0 to 25.1 cm / 0 to 9.9 in. UPCA 13 mil: 4 to 30.5 cm / 1.6 to 12 in. Code 39 20mil: 0 to 50 cm / 0 to 19.7 in. PDF417 5 mil: 2.8 to 4.5 cm / 1.1 to 1.8 in. PDF417 6.6 mil: 4.8 to 17.5 cm / 1.9 to 6.9 in. PDF417 10 mil: 0 to 22.9 cm / 0 to 9 in. PDF417 15 mil: 0 to 29.7 cm / 0 to 11.7 in.	
	Scanning angle	Pitch ± 70° Skew ± 70°	Pitch ± 65° Skew ± 50°	Pitch ±60° Skew±60°	
	PCS	Minimum 30%	Minimu	ım 45%	
	Scan rate	200 scans, decodes / second (1500WA: 100 scans / second)	100 scans / second	60 frames / second	
	Ambient illumination		100,000 lux		
	Hands-free scanning	Auto-sense and continuous modes	Continuous mode	Auto-sense mode, continuous mode and presentation mode	
	Barcodes support	Codabar, Code 39, Code 93, Code 128,GS1 DataBar (RSS), Industrial 2 of 5, Interleave 2 of 5, ISBT-128, Italian and French Pharmacodes, Matrix 2 of 5, MSI, Plessey, Telepen, UPC-A,UPC-E, EAN-8, EAN-13, GS1-128 (EAN-128)		1D: All major codes² 2D: PDF417, MicroPDF417, Composite, RSS, TLC-39, Datamatrix, QR code, Micro QR code, Aztec, MaxiCode Postal Codes: US PostNet, US Planet, UK Postal, Australian Postal, Japan Postal Dutch Postal (KIX)	
	Programmable features	Data editing, interface selection, symbology configuration			
	Language support	US and UK English, French, Italian, I	Belgian, Norwegian/Swedish, Spanish, Portugu	ese, German, Japanese and Turkish	
Physical	Dimension L x W x H	15.3 x 6.1 x 9.3 cm / 6.0 x 2.4 x 3.7 in.			
	Weight without cable / with battery	145 g / 5.1 oz. (1560: 173 g / 6.1 oz.)	1502: 149 g / 5.2 oz. 1562: 177 g / 6.2 oz.	1504: 154 g / 5.4 oz. 1564: 185 g / 6.5 oz.	
	Color	Black			
	Switch	Tactile Switch			
Electrical	Memory for Bluetooth scanner reserver buffer / batch mode	4 K / 512 K		10 K / 4 M	
	Working hours for Bluetooth scanner	24 / 12 hours depending on the CCD Sensor mode setting (Always Active function disabled/ Always Active function enabled, default setting)	24 hours based on 1 scans / 5 seconds	16 hours based on 1 scans / 5 seconds	
	Voltage	+5 V ±10% / 3.7 V 800 mAh Li-ion battery			
	Power consumption ³ Standby / Operating	50 mA / 265 mA (1560: 45 mA / 270 mA)	1502: 35 mA / 210 mA 1562: 25 mA / 210 mA	1504: 30 mA / 280 mA 1564: 35 mA / 230 mA	
User Environment	Temperature	Operating: 0°C to	o 50°C / 32°F to 122°F Storage: -20°C to 60°	C / -4°F to 140°F	
Oser Environment	Humidity	Operating: 10% to 90% Storage: 5% to 95%			
	Impact resistance	1.5 m (4.9 ft) multiple drops onto concrete (1560: 1.2 m (3.9 ft) multiple drops onto concrete)			
	Ingress protection	IP30			
	Electrostatic discharge	±8 kV contact ±15 kV air			
	EMC regulation	1500: BSMI, CE, C-tick, FCC, IC, KC 1500WA: CE, C-tick, FCC, IC 1560: BSMI, CE, C-tick, FCC, IC, KC, NCC, SRMC, TELEC	1502: CE, C-tick, FCC, IC 1562: BSMI, CE, C-tick, FCC, IC, KC, NCC, SRMC, TELEC	1504: BSMI, CE, C-tick, FCC, IC, KC 1564: BSMI, CE, C-tick, FCC, IC, NCC, KC, SRMC, TELEC	
	Configuration	Setup options include Windows-based ScanMaster software, by direct connection or printing out barcode settings			
	Accessories	USB, RS232 and keyboard wedge cables, Three-way desk/wall/auto-sense stand with optional weighted base, communucation stand for Bluetooth scanner provides Bluetooth communication for up to 7 scanners, single battery charger for Bluetooth scanner			
Warranty		5 years (1560: 3 years)	3 years (e	ngine 1 year)	

^{© 2011} CipherLab Co., Ltd. All specifications are subject to change without notice. All rights reserved. All brand, product and service, and trademark names are the property of their registered owners.







Legacy Technology Services

We Rent & Sell All Types Of Barcode Equipment

Call now to talk to an expert

866-271-9891

About us

- Legacy Technology Services is a leading nationwide provider of mobile computing, barcode, printers and point of sale equipment and services.
- For over a decade, thousands of clients across North America have trusted us to provide equipment from leading manufacturers backed by the services to support them.

Latest Hardware from top manufacturers

 Legacy handles virtually every major manufacturer of mobile computing, barcoding and point of sale equipment.

Expert Repair and Maintenance services

· Legacy is one of the best repair facilities in North America

Discontinued product sourcing

 They don't make it anymore? Our inventory also includes manufacturer close-outs and discontinued equipment to support our clients legacy infrastructure.

Trade-in and Disposal services

- That old equipment laying around your facility may still have some value.
 Legacy routinely purchases equipment from our clients around the globe.
 - · Data destruction
 - · Hardware disposal
 - Auditing services

Dedicated client account team

 Dedicated, highly trained account managers are here to answer all your questions and provide top notch service.

Equipment rental services

• Sometimes renting is a better solution, Legacy's huge rental inventory provides the equipment you need for temporary needs and projects.











Toll Free: 866-271-9891 Fax: 888-522-4684 www.LegacyGlobal.com

Some brands we carry





















